



**R770** Mini Fixed

---

**Dimensions** D86 x H43mm

---

**Watts** 7W

---


**Beam** 90°

---

**Cut Out** Ø 72mm

---

**Lumens** <700lm

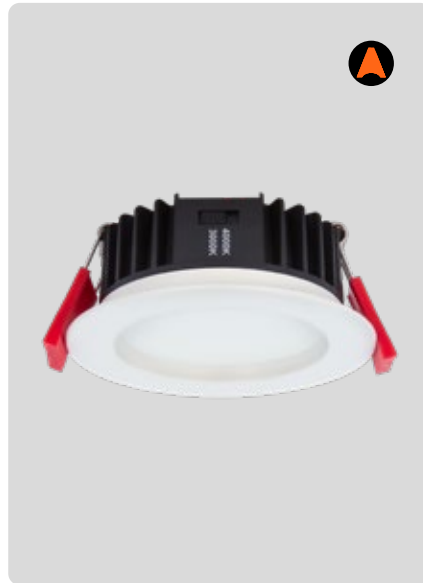

**R771** Standard Fixed

---

**Dimensions** D103 x H43mm

---

**Watts** 8W

---

**Beam** 90°

---

**Cut Out** Ø 92mm

---

**Lumens** <950lm



**R773** Standard Smart Tilt

---

**Dimensions** D103 x H54mm

---

**Watts** 8W

---

**Beam** 90°

---

**Cut Out** Ø 92mm

---

**Lumens** <850lm

---

**Tilt** 25°



**R772** Medium Fixed

---

**Dimensions** D130 x H43mm

---

**Watts** 10W

---

**Beam** 90°

---

**Cut Out** Ø 100 - 120mm

---

**Lumens** <1150lm



**R774** Large Fixed

---

**Dimensions** D160 x H43mm

---

**Watts** Selectable 9W or 15W

---

**Beam** 100°

---

**Cut Out** Ø 145mm

---

**Lumens** <1950lm

**Specifications**

Input	240V AC
Colour Temp	Selectable 3000K or 4000K. 2700K - 6500K
CRI	90
Lifespan	100,000hrs (L80 B10). Casambi: >60,000hrs (L80 B20).
Binning	SDCM 3
Material	Aluminium, ADC12, PBT, PC
IP Rating	IP44. R773: Patented IP44 smart tilt gasket
Clearance	25mm recommended for optimum lifespan. 0mm required. Rear of fitting may abut structural members and building elements.
Classification	IC-F / IC-4
Driver	R770 R771 R772 R773 R774: Included, DX Series Under Insulation. R771 Casambi: Included, Tunable White Casambi constant current driver (must be installed above insulation).
Dimming/Control	Phase-cut Dimmable, Casambi
TLAs	"Flicker-free", PstLM ≤1.0; SVM ≤0.4
Application	Interior, recessed
Warranty	5 Year Warranty

**Lumens**

	CCT	White	Black
R770	3000K	680lm	570lm
	4000K	700lm	590lm
R771	3000K	850lm	800lm
	4000K	950lm	850lm
R771 Casambi	2700K	800lm	750lm
	6500K	850lm	800lm
R772	3000K	1100lm	950lm
	4000K	1150lm	1000lm
R773	3000K	800lm	700lm
	4000K	850lm	750lm
R774 (9W)	3000K	1050lm	1000lm
	4000K	1100lm	1050lm
R774 (15W)	3000K	1850lm	1650lm
	4000K	1950lm	1750lm



White Black

**Available In**

Description	Code
<b>R770 - Mini</b>	
White, 3000K/4000K	R770 W34V3
Black, 3000K/4000K	R770 B34V3
<b>R771 - Standard</b>	
White, 3000K/4000K	R771 W34V3
White, 3000K/4000K 10 pack	R771 W3410V3
Black, 3000K/4000K	R771 B34V3
<b>R772 - Medium</b>	
White, 3000K/4000K	R772 W34V3
Black, 3000K/4000K	R772 B34V3
<b>R773 - Standard Tilt</b>	
White, 3000K/4000K	R773 W34V3
Black, 3000K/4000K	R773 B34V3
<b>R774 - Large</b>	
White, 3000K/4000K "Select" 9W/15W	R774 W34V3
Black, 3000K/4000K "Select" 9W/15W	R774 B34V3
Black, 3000K/4000K 18W fixed wattage, 260mA	R774 B34

**CASAMBI**

Description	Code
<b>R771 - Standard</b>	
White, 2700K-6500K Tunable White	R771 WCCTCAS
Black, 2700K-6500K Tunable White	R771 BCCTCAS



R771 Casambi Tunable  
White are pre-wired  
with GL240 adaptor