


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:230.68V I:0.1029A P:21.350W PF:0.8990 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2378.02x1 lm		
NAME: LED541 B34V2 (23W 3000K)	TYPE: 23W	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.: 1.2*0.12	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 111.38 lm/W			
MODEL	LED541 B34V2	I _{max} (cd)	1983	S/MH(C0/180)	0.93
NOMINAL POWER(W)	23	LOR(%)	100.0	S/MH(C90/270)	1.00
RATED VOLTAGE(V)	230	TOTAL FLUX(lm)	2378.0	η UP,DN(C0-180)	0.0,50.5
NOMINAL FLUX(lm)	2378.02	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.0,49.5
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	1.00
TEST VOLTAGE(V)	230	η down (%)	100.0	CIBSE SHR MAX	1.10

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

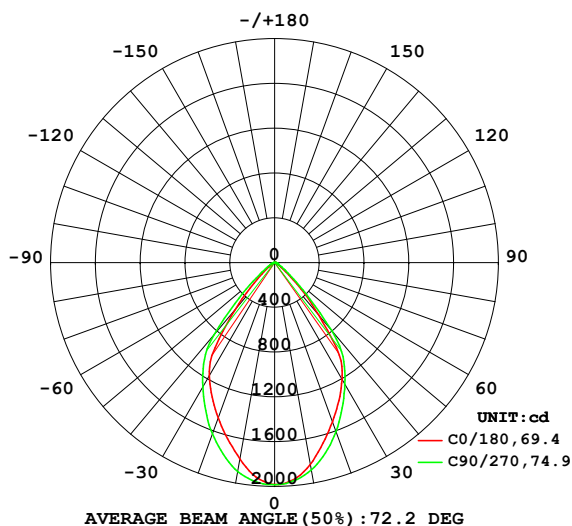

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

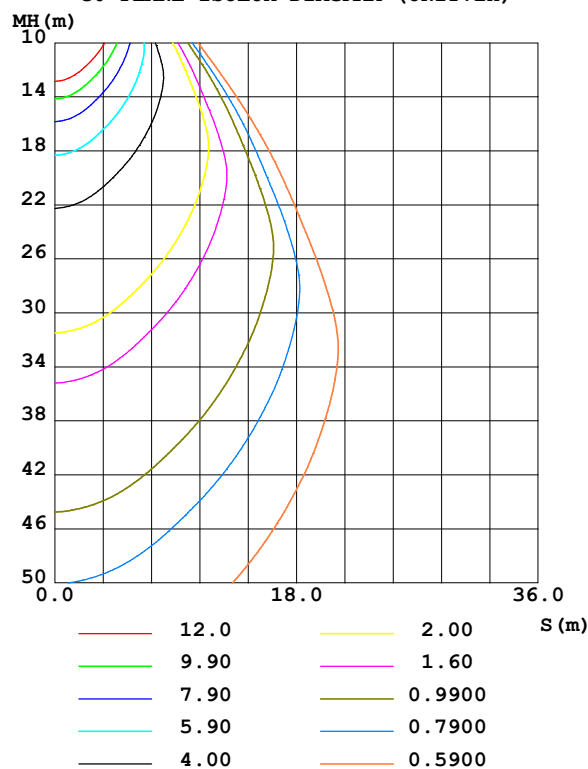

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3 °C
Operators: DAMIN
Test Date: 2023-04-11

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000H_V1 SYSTEM V2.00.456
Humidity: 65.0%
Test Distance: 9.640m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	1783	1815	1895	1882	1833	1839	1882	1859	0- 10	182.7	182.7	7.68,7.68
20	1476	1470	1628	1590	1513	1494	1605	1552	10- 20	477.8	660.5	27.8,27.8
30	1167	1149	1283	1179	1206	1164	1256	1129	20- 30	628.6	1289	54.2,54.2
40	549.5	890.5	842.0	692.7	614.2	892.6	796.0	628.6	30- 40	615.1	1904	80.1,80.1
50	110.8	272.7	219.6	149.4	135.2	284.9	200.6	101.8	40- 50	330.3	2234	94,94
60	30.62	93.70	60.97	33.42	34.73	95.48	60.75	31.40	50- 60	90.80	2325	97.8,97.8
70	10.85	25.55	25.95	17.22	12.69	27.74	25.16	15.53	60- 70	33.95	2359	99.2,99.2
80	4.296	8.601	13.12	7.136	5.453	9.870	12.45	6.085	70- 80	13.60	2373	99.8,99.8
90	0.7532	2.790	2.500	1.785	1.059	2.793	0.1957	0.7502	80- 90	5.244	2378	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 2117.4 lm

%lum = 89.0%

%lamp = 89.0%

Conical surface Flux(130deg): 2346.1 lm

%lum = 98.7%


%lamp = 98.7%

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-04-11

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000H_V1 SYSTEM V2.00.456
 Humidity:65.0%
 Test Distance:9.640m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:230.68V I:0.1029A P:21.350W PF:0.8990 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2378.02x1 lm		
NAME: LED541 B34V2 (23W 3000K)	TYPE: 23W	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.: 1.2*0.12	Shielding Angle:

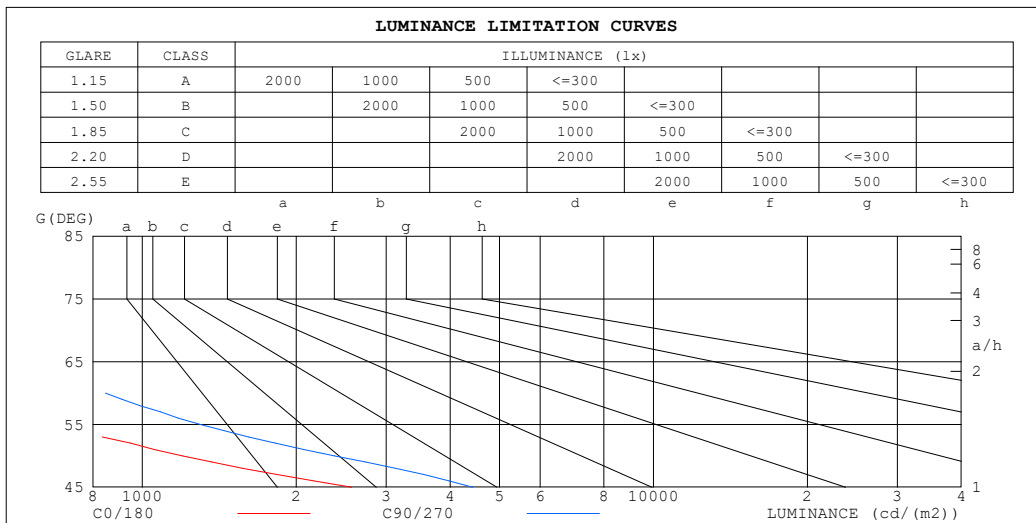


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3°C
Operators: DAMIN
Test Date: 2023-04-11

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000H_V1 SYSTEM V2.00.456
Humidity: 65.0%
Test Distance: 9.640m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:230.68V I:0.1029A P:21.350W PF:0.8990 Freq:49.99Hz			UTHDi:0.00% ITHDi:0.00% KDisp:0			Lamp Flux:2378.02x1 lm		
NAME: LED541 B34V2 (23W 3000K)			TYPE: 23W			WEIGHT:		
SPEC.: 3000K			DIM.:			SERIAL No.:		
MFR.: EVERFINE			SUR.: 1.2*0.12			Shielding Angle:		

pcc	80%			70%			50%			30%			10%			0														
p _w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0														
p _{fc}	20%			20%			20%			20%			20%			0														
RCR	RCR:Room Cavity Ratio															Coefficients of Utilization(CU)														
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00														
1.0	1.09	1.07	1.04	1.07	1.05	1.02	1.03	1.01	.99	.99	.98	.96	.96	.95	.94	.92														
2.0	1.00	.96	.92	.99	.94	.91	.95	.92	.89	.92	.89	.87	.90	.87	.85	.83														
3.0	.92	.87	.82	.91	.86	.81	.88	.84	.80	.86	.82	.79	.83	.80	.78	.76														
4.0	.85	.79	.74	.84	.78	.73	.82	.77	.73	.80	.75	.72	.78	.74	.71	.69														
5.0	.79	.72	.67	.78	.71	.67	.76	.70	.66	.74	.69	.65	.72	.68	.65	.63														
6.0	.73	.66	.61	.72	.65	.61	.70	.65	.60	.69	.64	.60	.67	.63	.60	.58														
7.0	.68	.61	.56	.67	.60	.56	.65	.60	.55	.64	.59	.55	.63	.58	.55	.53														
8.0	.63	.56	.52	.62	.56	.51	.61	.55	.51	.60	.55	.51	.59	.54	.51	.49														
9.0	.59	.52	.48	.58	.52	.48	.57	.51	.47	.56	.51	.47	.55	.51	.47	.46														
10.0	.55	.49	.44	.55	.48	.44	.54	.48	.44	.53	.48	.44	.52	.47	.44	.42														

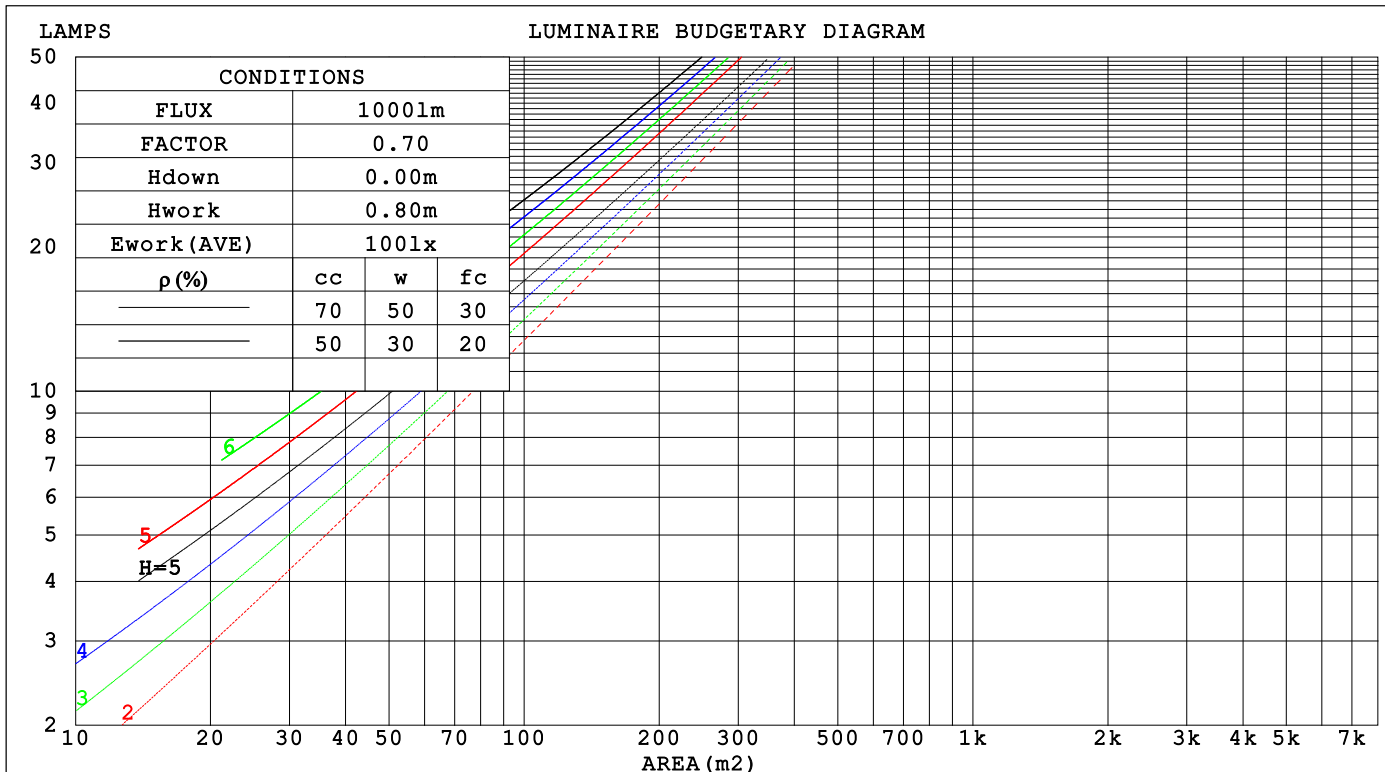

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:DAMIN
Test Date:2023-04-11

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000H_V1 SYSTEM V2.00.456
Humidity:65.0%
Test Distance:9.640m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:230.68V I:0.1029A P:21.350W PF:0.8990 Freq:49.99Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2378.02x1 lm		
NAME: LED541 B34V2 (23W 3000K)	TYPE: 23W	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.: 1.2*0.12	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)										
0.0																	
1.0	.203	.115	.036	.196	.112	.035	.183	.105	.034	.171	.099	.032	.161	.093	.030		
2.0	.196	.107	.033	.190	.105	.032	.179	.100	.031	.169	.095	.030	.160	.090	.029		
3.0	.187	.100	.030	.182	.097	.029	.173	.094	.028	.164	.090	.028	.156	.086	.027		
4.0	.178	.093	.027	.174	.091	.027	.166	.088	.026	.158	.085	.026	.151	.082	.025		
5.0	.169	.086	.025	.166	.085	.025	.158	.083	.024	.152	.080	.024	.146	.078	.023		
6.0	.161	.081	.023	.158	.080	.023	.152	.078	.023	.146	.076	.022	.140	.074	.022		
7.0	.154	.076	.022	.151	.075	.021	.145	.073	.021	.140	.072	.021	.135	.070	.021		
8.0	.146	.072	.020	.144	.071	.020	.139	.069	.020	.134	.068	.020	.129	.066	.019		
9.0	.140	.068	.019	.137	.067	.019	.133	.066	.019	.128	.064	.018	.124	.063	.018		
10.0	.133	.064	.018	.131	.063	.018	.127	.062	.018	.123	.061	.017	.120	.060	.017		

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients (CCEC)										
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020		
1.0	.173	.157	.143	.148	.135	.123	.101	.093	.085	.058	.054	.049	.019	.017	.016		
2.0	.159	.132	.110	.137	.114	.095	.094	.079	.066	.054	.046	.039	.017	.015	.013		
3.0	.148	.114	.086	.127	.098	.075	.087	.068	.052	.050	.040	.031	.016	.013	.010		
4.0	.139	.099	.069	.120	.086	.060	.082	.060	.042	.048	.035	.025	.015	.011	.008		
5.0	.131	.088	.056	.113	.076	.049	.078	.053	.035	.045	.031	.020	.015	.010	.007		
6.0	.125	.079	.047	.107	.069	.041	.074	.048	.029	.043	.028	.017	.014	.009	.006		
7.0	.118	.072	.039	.102	.062	.034	.070	.044	.024	.041	.026	.014	.013	.008	.005		
8.0	.113	.066	.034	.097	.057	.029	.067	.040	.021	.039	.024	.012	.013	.008	.004		
9.0	.108	.061	.029	.093	.053	.026	.064	.037	.018	.037	.022	.011	.012	.007	.004		
10.0	.103	.057	.026	.089	.049	.022	.062	.035	.016	.036	.020	.010	.012	.007	.003		

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:DAMIN
Test Date:2023-04-11

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000H_V1 SYSTEM V2.00.456
Humidity:65.0%
Test Distance:9.640m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:230.68V I:0.1029A P:21.350W PF:0.8990 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2378.02x1 lm										
NAME: LED541 B34V2 (23W 3000K)					TYPE: 23W			WEIGHT:		
SPEC.: 3000K					DIM.:			SERIAL No.:		
MFR.: EVERFINE					SUR.: 1.2*0.12			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	13.6	14.7	13.8	14.8	15.0	15.1	16.2	15.3	16.3	16.5
3H	13.4	14.4	13.7	14.6	14.8	15.0	16.0	15.2	16.2	16.4
4H	13.3	14.3	13.6	14.5	14.8	14.9	15.9	15.2	16.1	16.3
6H	13.3	14.1	13.6	14.4	14.7	14.9	15.8	15.2	16.0	16.3
8H	13.2	14.1	13.5	14.3	14.6	14.9	15.7	15.2	16.0	16.3
12H	13.2	14.0	13.5	14.3	14.5	14.8	15.7	15.2	15.9	16.2
4H 2H	13.5	14.4	13.8	14.7	14.9	14.9	15.9	15.2	16.1	16.3
3H	13.4	14.2	13.7	14.5	14.7	14.9	15.7	15.2	16.0	16.2
4H	13.3	14.0	13.6	14.3	14.6	14.8	15.6	15.2	15.9	16.2
6H	13.2	13.9	13.6	14.2	14.5	14.8	15.5	15.2	15.8	16.1
8H	13.2	13.8	13.6	14.1	14.5	14.8	15.4	15.2	15.8	16.1
12H	13.1	13.7	13.5	14.1	14.4	14.8	15.4	15.2	15.7	16.1
8H 4H	13.2	13.8	13.6	14.1	14.5	14.7	15.3	15.1	15.7	16.0
6H	13.1	13.6	13.6	14.0	14.4	14.7	15.2	15.1	15.6	16.0
8H	13.1	13.5	13.5	13.9	14.4	14.7	15.2	15.2	15.6	16.0
12H	13.1	13.4	13.5	13.9	14.3	14.8	15.1	15.2	15.6	16.0
12H 4H	13.1	13.7	13.6	14.1	14.5	14.7	15.2	15.1	15.6	16.0
6H	13.1	13.5	13.5	13.9	14.4	14.7	15.1	15.1	15.5	16.0
8H	13.1	13.4	13.5	13.9	14.3	14.7	15.1	15.2	15.5	16.0
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 2.7 / - 6.9					+ 2.5 / - 5.3				
1.5H	+ 3.4 / - 5.8					+ 2.8 / - 4.1				
2.0H	+ 4.0 / - 5.3					+ 4.6 / - 4.3				

CIE Pub.117, 2378 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = 3.0)
Area: 0.144 m2

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:DAMIN
Test Date:2023-04-11

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000H_V1 SYSTEM V2.00.456
Humidity:65.0%
Test Distance:9.640m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:230.68V I:0.1029A P:21.350W PF:0.8990 Freq:49.99Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2378.02x1 lm		
NAME: LED541 B34V2 (23W 3000K)	TYPE: 23W	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.: 1.2*0.12	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	79	71	66	78	71	66	77	70	66	62
0.80	88	80	76	87	80	75	86	79	75	71
1.00	94	87	82	93	86	82	91	87	82	77
1.25	99	92	88	98	92	88	96	91	87	82
1.50	102	96	92	101	96	92	98	94	91	86
2.00	106	101	97	104	100	96	102	98	95	89
2.50	108	103	100	106	102	99	103	100	97	91
3.00	110	106	103	108	104	101	105	102	99	93
4.00	112	109	106	110	107	105	106	104	102	95
5.00	114	111	108	111	109	107	107	105	104	96
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3 °C
Operators: DAMIN
Test Date: 2023-04-11

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000H_V1 SYSTEM V2.00.456
Humidity: 65.0%
Test Distance: 9.640m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:230.68V I:0.1029A P:21.350W PF:0.8990 Freq:49.99Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2378.02x1 lm		
NAME: LED541 B34V2 (23W 3000K)	TYPE: 23W	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.: 1.2*0.12	Shielding Angle:

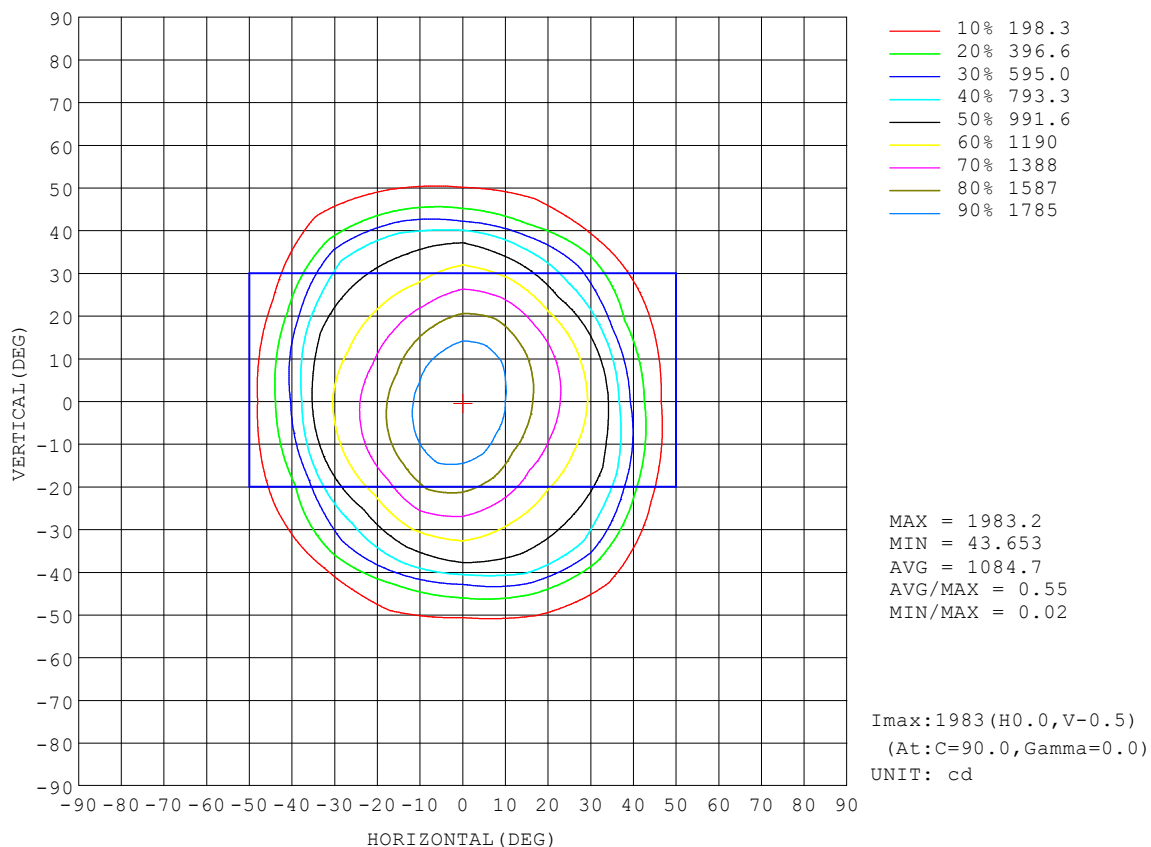


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:DAMIN
Test Date:2023-04-11

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000H_V1 SYSTEM V2.00.456
Humidity:65.0%
Test Distance:9.640m [K=1.0000]
Remarks:

AAI Figure

Test:U:230.68V I:0.1029A P:21.350W PF:0.8990 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2378.02x1 lm		
NAME: LED541 B34V2 (23W 3000K)	TYPE: 23W	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.: 1.2*0.12	Shielding Angle:

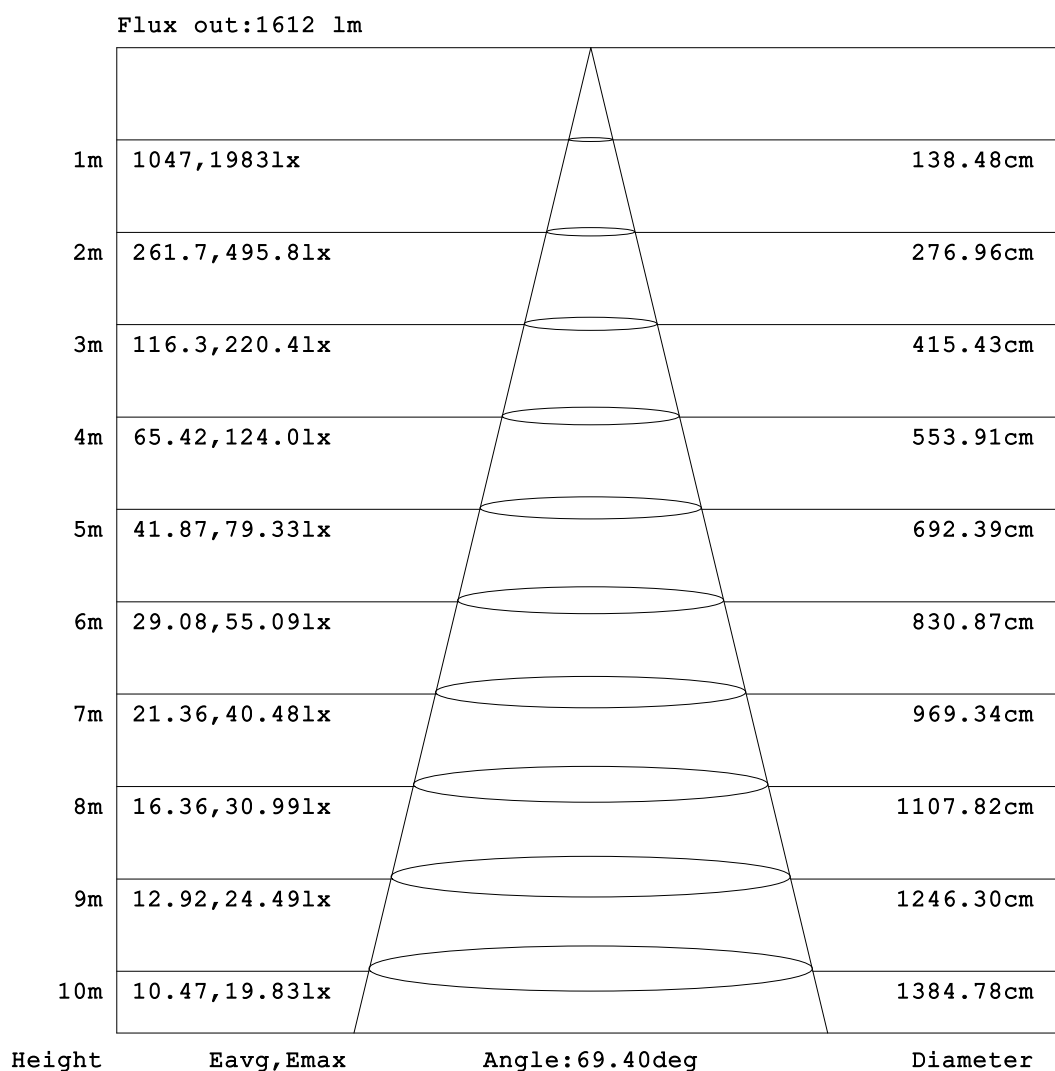


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3°C
 Operators: DAMIN
 Test Date: 2023-04-11

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000H_V1 SYSTEM V2.00.456
 Humidity: 65.0%
 Test Distance: 9.640m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:230.68V I:0.1029A P:21.350W PF:0.8990 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2378.02x1 lm		
NAME: LED541 B34V2 (23W 3000K)	TYPE: 23W	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.: 1.2*0.12	Shielding Angle:

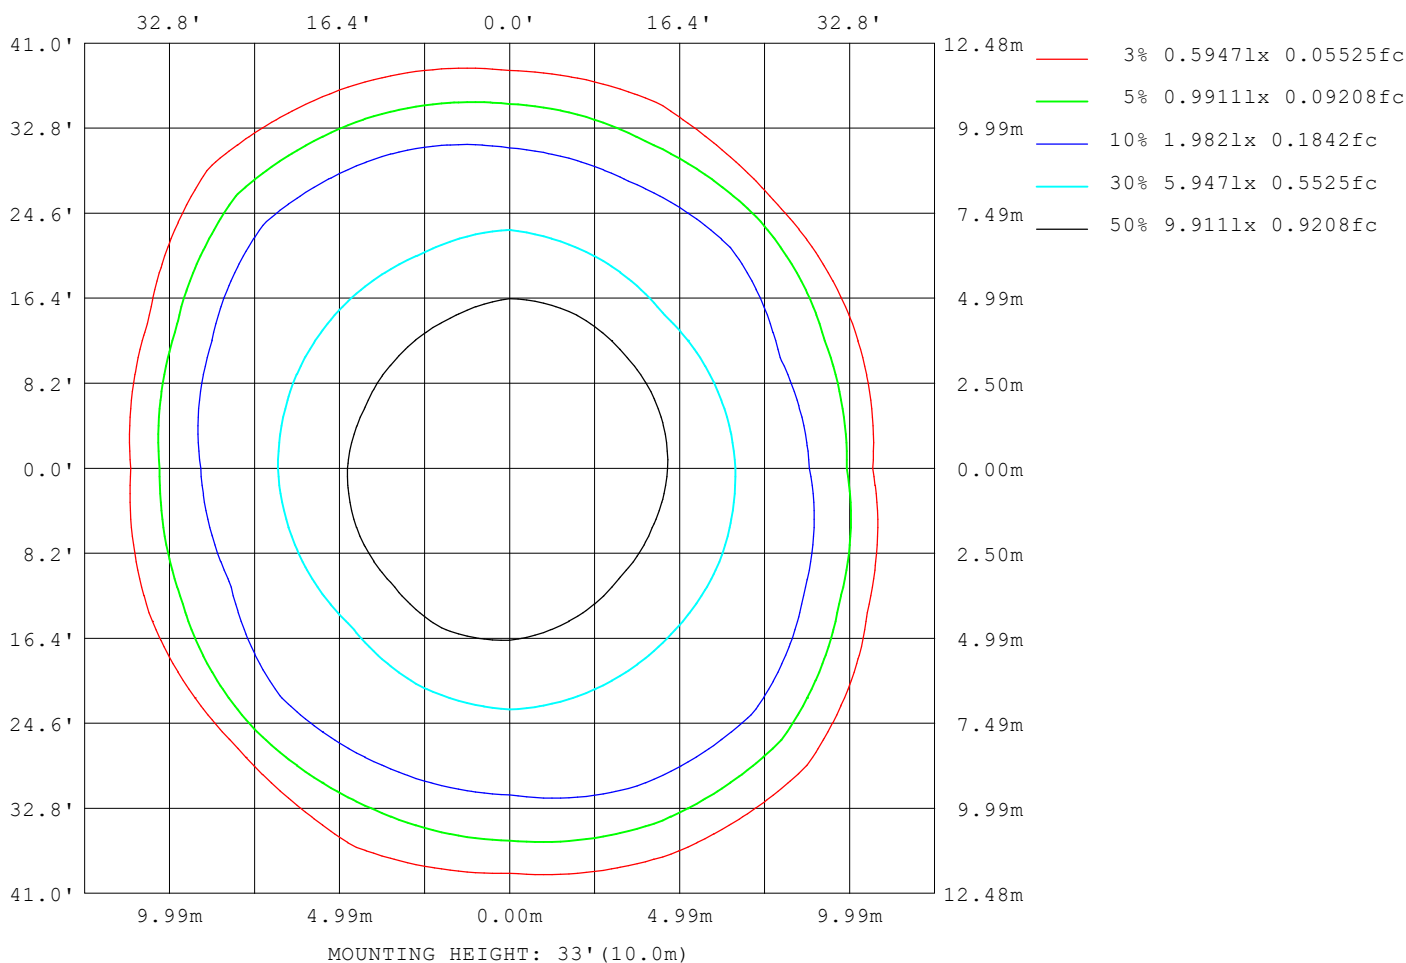

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:DAMIN
Test Date:2023-04-11

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000H_V1 SYSTEM V2.00.456
Humidity:65.0%
Test Distance:9.640m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:230.68V I:0.1029A P:21.350W PF:0.8990 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2378.02x1 lm		
NAME: LED541 B34V2 (23W 3000K)	TYPE: 23W	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.: 1.2*0.12	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	312
L_0~180 (75) av	211
L_0~180 (85) av	201
L_90~270 (65) av	627
L_90~270 (75) av	503
L_90~270 (85) av	589
L_45 (65) av	661
L_45 (75) av	323
L_45 (85) av	367

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:DAMIN
Test Date:2023-04-11

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000H_V1 SYSTEM V2.00.456
Humidity:65.0%
Test Distance:9.640m [K=1.0000]
Remarks:

Planar Illuminance Curve

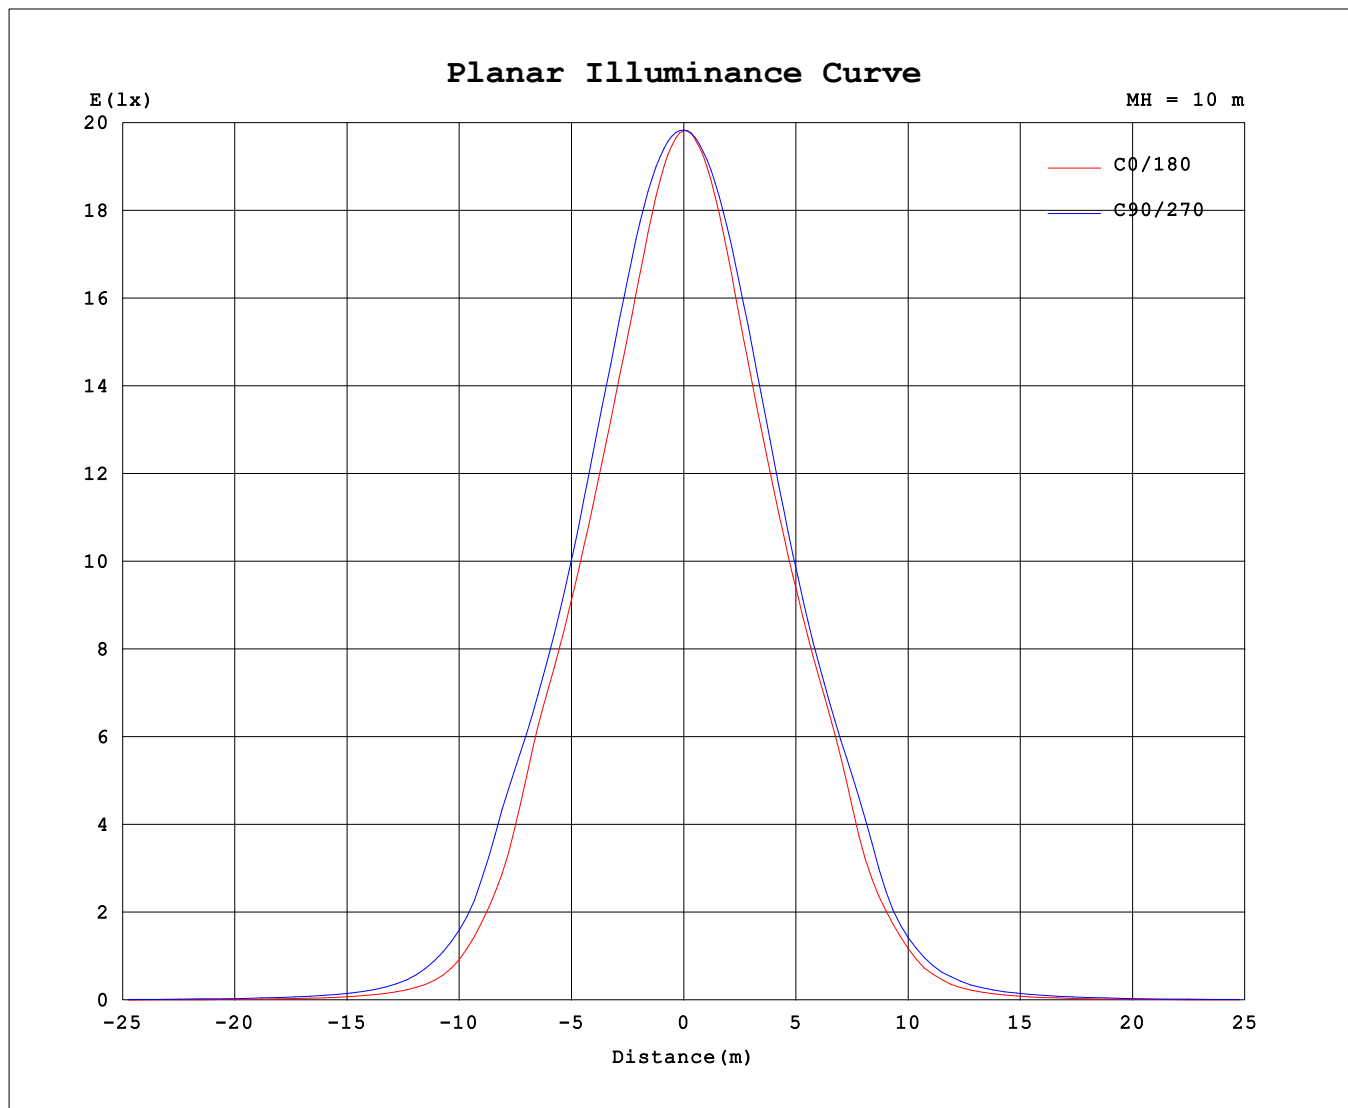

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3 °C
Operators: DAMIN
Test Date: 2023-04-11

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000H_V1 SYSTEM V2.00.456
Humidity: 65.0%
Test Distance: 9.640m [K=1.0000]
Remarks:

Test: U:230.68V I:0.1029A P:21.350W PF:0.8990 Freq:49.99Hz UTHDi: 0.00% ITHDi: 0.00% KDisp: 0 Lamp Flux: 2378.02x1 lm		
NAME: LED541 B34V2 (23W 3000K)	TYPE: 23W	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.: 1.2*0.12	Shielding Angle:

UNIT: cd

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3°C
Operators: DAMIN
Test Date: 2023-04-11

```

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000H_V1 SYSTEM V2.00.456
Humidity:65.0%
Test Distance:9.640m [K=1.0000]
Remarks:

```