


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:230.16V I:0.1636A P:35.652W PF:0.9466 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:4222.89x1 lm		
NAME: LED542 W34 (35W 4000K)	TYPE: 35W	WEIGHT:
SPEC.: 4000K	DIM.:	SERIAL No.: #1
MFR.:	SUR.: 0.155	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 118.45 lm/W			
MODEL	LED542 W34 (35W/4K)	I _{max} (cd)	2932	S/MH(C0/180)	1.10
NOMINAL POWER(W)	35	LOR(%)	100.0	S/MH(C90/270)	1.15
RATED VOLTAGE(V)		TOTAL FLUX(lm)	4222.9	η UP,DN(C0-180)	0.0,49.0
NOMINAL FLUX(lm)	4222.89	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.0,51.0
LAMPS INSIDE	1	η up(%)	0.0	CIBSE SHR NOM	1.00
TEST VOLTAGE(V)		η down(%)	100.0	CIBSE SHR MAX	1.15

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

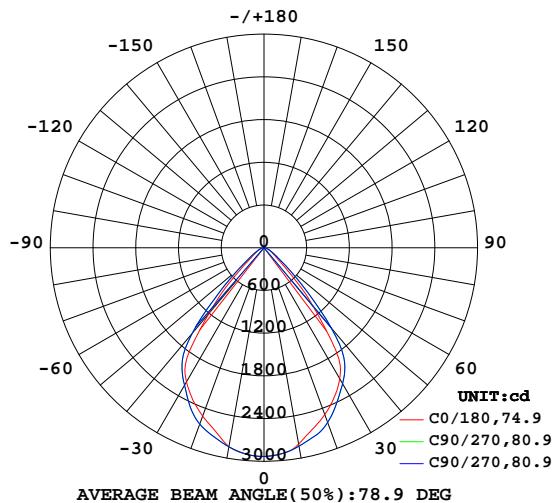

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

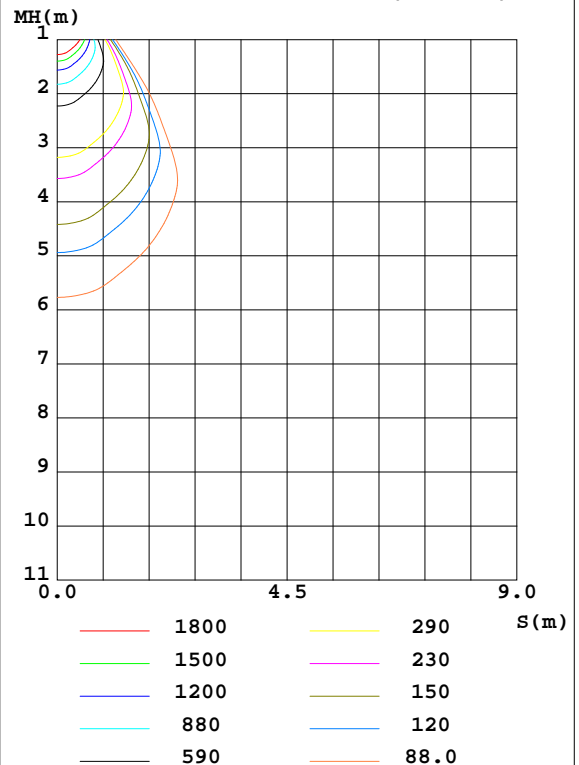

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2021-12-09

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.446
Humidity:65.0%
Test Distance:8.690m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C90	C180	C270					γ	Φ zone	Φ total	%lum, lamp
10	2802	2831	2836	2841					0- 10	275.0	275.0	6.51,6.51
20	2495	2612	2517	2638					10- 20	760.6	1036	24.5,24.5
30	2127	2207	2177	2233					20- 30	1098	2134	50.5,50.5
40	1080	1471	1203	1573					30- 40	1150	3284	77.8,77.8
50	272.8	418.0	301.9	458.9					40- 50	589.3	3873	91.7,91.7
60	120.3	142.7	126.8	154.2					50- 60	195.6	4069	96.3,96.3
70	62.47	61.50	66.45	66.89					60- 70	94.48	4163	98.6,98.6
80	24.12	25.22	27.83	27.04					70- 80	46.36	4209	99.7,99.7
90	0.5241	0.9929	1.237	1.157					80- 90	13.50	4223	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 3662.1 lm

%lum = 86.7%

%lamp = 86.7%

Conical surface Flux(120deg): 4068.5 lm

%lum = 96.3%

%lamp = 96.3%

0 - 45 DEG Zonal Flux:3662.1 %lum: 86.7%

0 - 60 DEG Zonal Flux:4068.5 %lum: 96.3%

All measured values may vary less than 35 %

from the average measured value in the 0 to 130 deg. zone: 7.4%

All measured values in the 0 to 130 deg. zone

may vary less than 50% from the average value of itself: 11.3%

C Range: 0 - 360DEG

C Interval: 90.0DEG

Test Speed: HIGH

Temperature:25.3DEG

Operators:

Test Date:2021-12-09

γ Range: 0 - 90DEG

γ Interval: 1.0DEG

Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.446


Humidity:65.0%

Test Distance:8.690m [K=1.0000]

Remarks:

LUMINANCE LIMITATION CURVES

Test:U:230.16V I:0.1636A P:35.652W PF:0.9466 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:4222.89x1 lm		
NAME: LED542 W34 (35W 4000K)	TYPE: 35W	WEIGHT:
SPEC.: 4000K	DIM.:	SERIAL No.: #1
MFR.:	SUR.: 0.155	Shielding Angle:

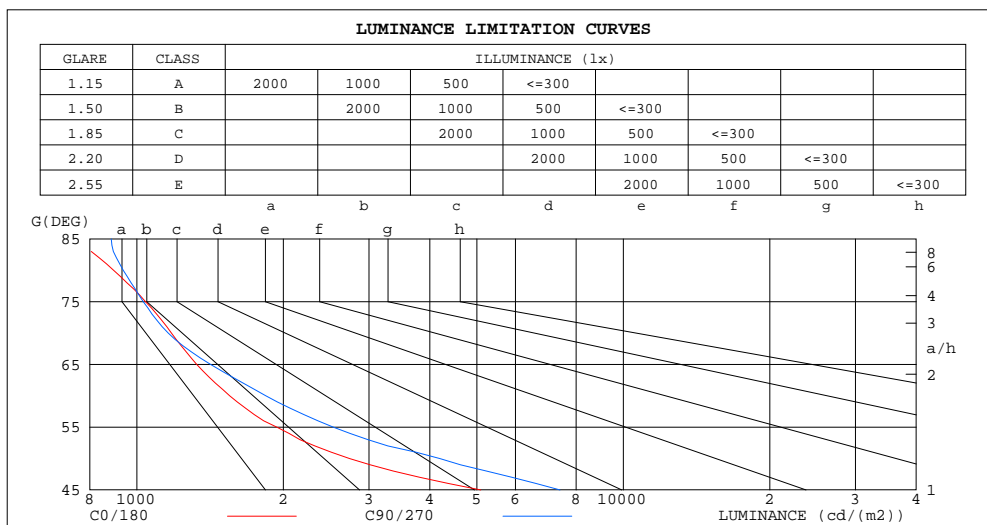

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	737	886
80	896	937
75	1042	1031
70	1178	1160
65	1328	1418
60	1552	1842
55	1941	2536
50	2737	4196
45	5090	7409


C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2021-12-09

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.446
Humidity:65.0%
Test Distance:8.690m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:230.16V I:0.1636A P:35.652W PF:0.9466 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:4222.89x1 lm		
NAME: LED542 W34 (35W 4000K)	TYPE: 35W	WEIGHT:
SPEC.: 4000K	DIM.:	SERIAL No.: #1
MFR.:	SUR.: 0.155	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio			Coefficients of Utilization(CU)												
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1.0	1.09	1.06	1.03	1.07	1.04	1.02	1.03	1.01	.99	.99	.97	.96	.95	.94	.93	.91
2.0	.00	.95	.91	.98	.93	.90	.94	.91	.88	.91	.88	.86	.89	.86	.84	.82
3.0	.91	.85	.80	.90	.84	.80	.87	.82	.78	.84	.80	.77	.82	.79	.76	.74
4.0	.84	.77	.72	.82	.76	.71	.80	.75	.71	.78	.73	.70	.76	.72	.69	.67
5.0	.77	.70	.65	.76	.69	.65	.74	.68	.64	.72	.67	.63	.71	.66	.63	.61
6.0	.71	.64	.59	.70	.63	.59	.68	.63	.58	.67	.62	.58	.66	.61	.57	.56
7.0	.66	.59	.54	.65	.58	.54	.64	.58	.53	.62	.57	.53	.61	.56	.53	.51
8.0	.61	.54	.49	.60	.54	.49	.59	.53	.49	.58	.53	.49	.57	.52	.48	.47
9.0	.57	.50	.45	.56	.50	.45	.55	.49	.45	.54	.49	.45	.53	.48	.45	.43
10.0	.53	.46	.42	.53	.46	.42	.52	.46	.42	.51	.45	.42	.50	.45	.41	.40

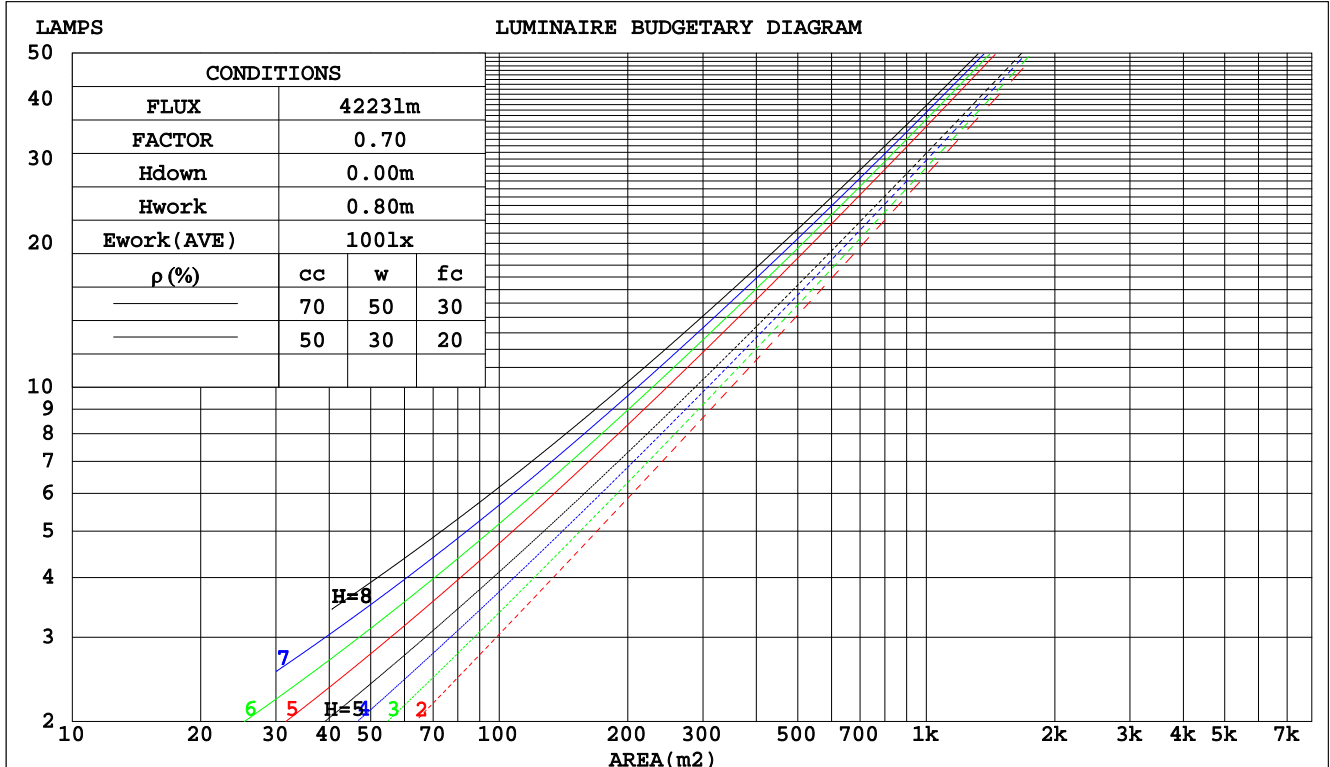

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2021-12-09

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.446
Humidity:65.0%
Test Distance:8.690m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:230.16V I:0.1636A P:35.652W PF:0.9466 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:4222.89x1 lm		
NAME: LED542 W34 (35W 4000K)	TYPE: 35W	WEIGHT:
SPEC.: 4000K	DIM.:	SERIAL No.: #1
MFR.:	SUR.: 0.155	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)										
0.0																	
1.0	.212	.121	.038	.205	.117	.037	.193	.110	.035	.181	.104	.033	.170	.099	.032		
2.0	.205	.112	.034	.199	.110	.034	.188	.105	.032	.178	.100	.031	.169	.095	.030		
3.0	.195	.104	.031	.190	.102	.031	.181	.098	.030	.172	.094	.029	.164	.091	.028		
4.0	.185	.096	.028	.181	.095	.028	.173	.092	.027	.165	.089	.027	.158	.086	.026		
5.0	.176	.090	.026	.172	.088	.026	.165	.086	.025	.158	.083	.025	.152	.081	.024		
6.0	.167	.084	.024	.164	.083	.024	.157	.081	.023	.151	.079	.023	.145	.077	.023		
7.0	.159	.078	.022	.156	.078	.022	.150	.076	.022	.145	.074	.022	.140	.072	.021		
8.0	.151	.074	.021	.148	.073	.021	.143	.072	.020	.138	.070	.020	.134	.069	.020		
9.0	.144	.070	.019	.142	.069	.019	.137	.068	.019	.133	.066	.019	.128	.065	.019		
10.0	.137	.066	.018	.135	.065	.018	.131	.064	.018	.127	.063	.018	.123	.062	.018		

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.174	.157	.142	.148	.135	.122	.102	.093	.085	.058	.054	.049	.019	.017	.016	
2.0	.161	.132	.109	.138	.114	.094	.094	.079	.065	.054	.046	.038	.017	.015	.013	
3.0	.150	.114	.085	.129	.098	.074	.088	.068	.052	.051	.040	.030	.016	.013	.010	
4.0	.141	.100	.068	.121	.086	.059	.083	.060	.041	.048	.035	.025	.015	.011	.008	
5.0	.133	.088	.055	.115	.076	.048	.079	.053	.034	.046	.031	.020	.015	.010	.007	
6.0	.126	.080	.046	.109	.069	.040	.075	.048	.028	.044	.028	.017	.014	.009	.006	
7.0	.120	.072	.039	.103	.063	.034	.071	.044	.024	.042	.026	.014	.013	.008	.005	
8.0	.115	.066	.033	.099	.058	.029	.068	.040	.020	.040	.024	.012	.013	.008	.004	
9.0	.110	.061	.029	.094	.053	.025	.065	.037	.018	.038	.022	.011	.012	.007	.004	
10.0	.105	.057	.025	.090	.050	.022	.063	.035	.016	.037	.021	.009	.012	.007	.003	

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2021-12-09

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.446
Humidity:65.0%
Test Distance:8.690m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:230.16V I:0.1636A P:35.652W PF:0.9466 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:4222.89x1 lm										
NAME: LED542 W34 (35W 4000K)					TYPE: 35W			WEIGHT:		
SPEC.: 4000K					DIM.:			SERIAL No.: #1		
MFR.:					SUR.: 0.155			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	15.1	16.3	15.4	16.5	16.6	16.0	17.1	16.2	17.3	17.5
3H	15.2	16.2	15.5	16.5	16.7	16.0	17.0	16.2	17.2	17.4
4H	15.2	16.2	15.5	16.4	16.7	16.0	17.0	16.3	17.2	17.4
6H	15.2	16.2	15.5	16.4	16.7	16.0	16.9	16.3	17.1	17.4
8H	15.2	16.1	15.5	16.4	16.6	15.9	16.8	16.3	17.1	17.4
12H	15.2	16.0	15.5	16.3	16.6	15.9	16.8	16.3	17.1	17.3
4H 2H	15.0	16.0	15.3	16.3	16.5	15.8	16.8	16.1	17.0	17.3
3H	15.2	16.0	15.5	16.3	16.6	15.9	16.8	16.2	17.0	17.3
4H	15.3	16.0	15.6	16.3	16.7	15.9	16.7	16.3	17.0	17.3
6H	15.3	16.0	15.7	16.3	16.7	16.0	16.7	16.4	17.0	17.4
8H	15.3	16.0	15.7	16.3	16.7	16.0	16.6	16.4	17.0	17.4
12H	15.3	15.9	15.8	16.3	16.7	16.0	16.6	16.4	16.9	17.3
8H 4H	15.2	15.9	15.6	16.2	16.6	15.9	16.5	16.3	16.9	17.2
6H	15.3	15.9	15.8	16.3	16.7	16.0	16.5	16.4	16.9	17.3
8H	15.4	15.8	15.8	16.3	16.7	16.0	16.5	16.5	16.9	17.3
12H	15.4	15.8	15.9	16.2	16.7	16.0	16.4	16.5	16.9	17.3
12H 4H	15.2	15.8	15.6	16.1	16.5	15.9	16.4	16.3	16.8	17.2
6H	15.3	15.8	15.8	16.2	16.6	16.0	16.4	16.4	16.8	17.3
8H	15.4	15.8	15.8	16.2	16.7	16.0	16.4	16.5	16.8	17.3
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 1.8 / - 3.4					+ 2.0 / - 3.8				
1.5H	+ 3.0 / - 3.0					+ 3.5 / - 3.6				
2.0H	+ 3.2 / - 1.7					+ 4.5 / - 2.5				

CIE Pub.117, 4223 lm Total Lamp Luminous Flux Corrected ($8\log(F/F_0) = 5.0$)
Area: 0.155 m²

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2021-12-09

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.446
Humidity:65.0%
Test Distance:8.690m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:230.16V I:0.1636A P:35.652W PF:0.9466 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:4222.89x1 lm		
NAME: LED542 W34 (35W 4000K)	TYPE: 35W	WEIGHT:
SPEC.: 4000K	DIM.:	SERIAL No.: #1
MFR.:	SUR.: 0.155	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	78	69	65	77	69	65	76	69	64	60
0.80	86	79	74	86	78	74	84	78	73	69
1.00	93	85	81	92	85	80	90	85	80	75
1.25	98	91	87	97	90	86	94	89	85	80
1.50	101	95	91	100	94	90	97	93	89	84
2.00	105	100	96	104	99	95	101	97	94	88
2.50	107	103	99	106	101	98	102	99	96	90
3.00	109	105	102	108	104	101	104	101	98	92
4.00	112	108	105	110	107	104	106	103	101	94
5.00	113	110	108	111	108	106	107	105	103	95
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2021-12-09

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.446
Humidity:65.0%
Test Distance:8.690m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:230.16V I:0.1636A P:35.652W PF:0.9466 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:4222.89x1 lm		
NAME: LED542 W34 (35W 4000K)	TYPE: 35W	WEIGHT:
SPEC.: 4000K	DIM.:	SERIAL No.: #1
MFR.:	SUR.: 0.155	Shielding Angle:

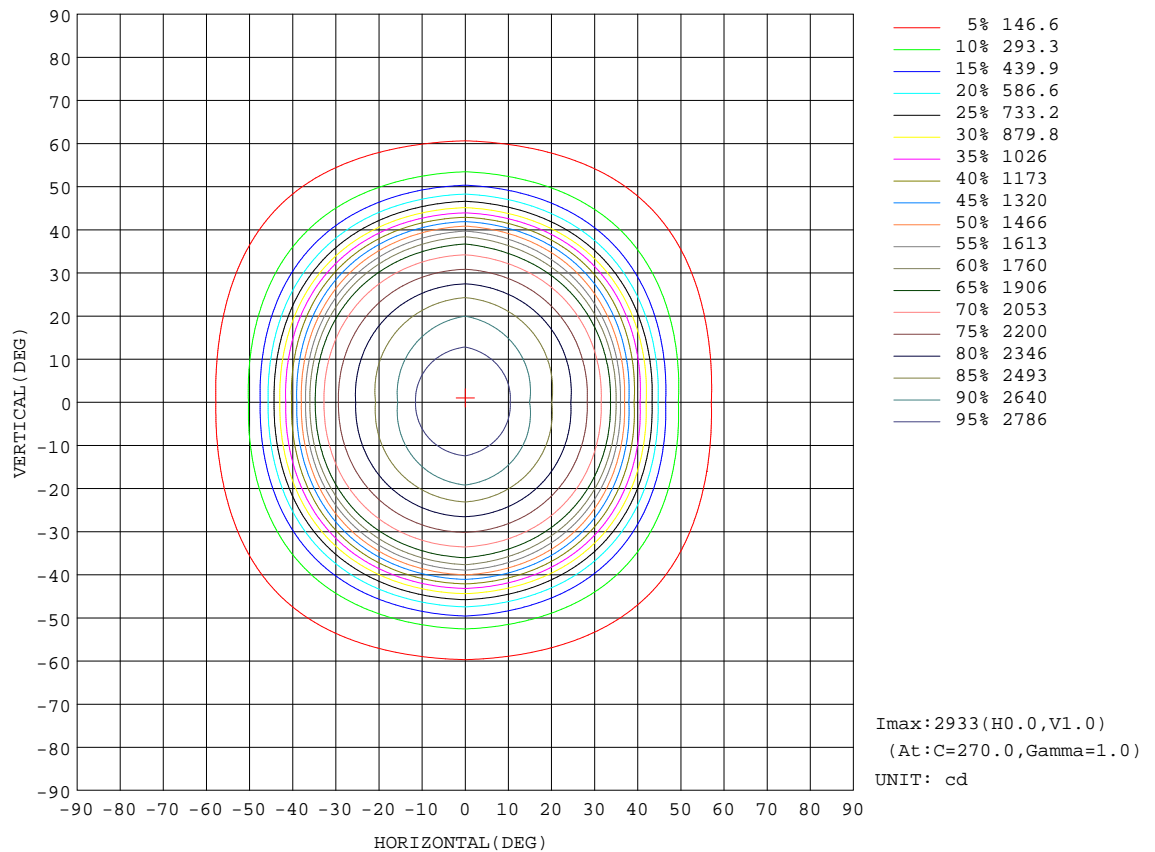


C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2021-12-09

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.446
Humidity: 65.0%
Test Distance: 8.690m [K=1.0000]
Remarks:

AAI Figure

Test:U:230.16V I:0.1636A P:35.652W PF:0.9466 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:4222.89x1 lm		
NAME: LED542 W34 (35W 4000K)	TYPE: 35W	WEIGHT:
SPEC.: 4000K	DIM.:	SERIAL No.: #1
MFR.:	SUR.: 0.155	Shielding Angle:

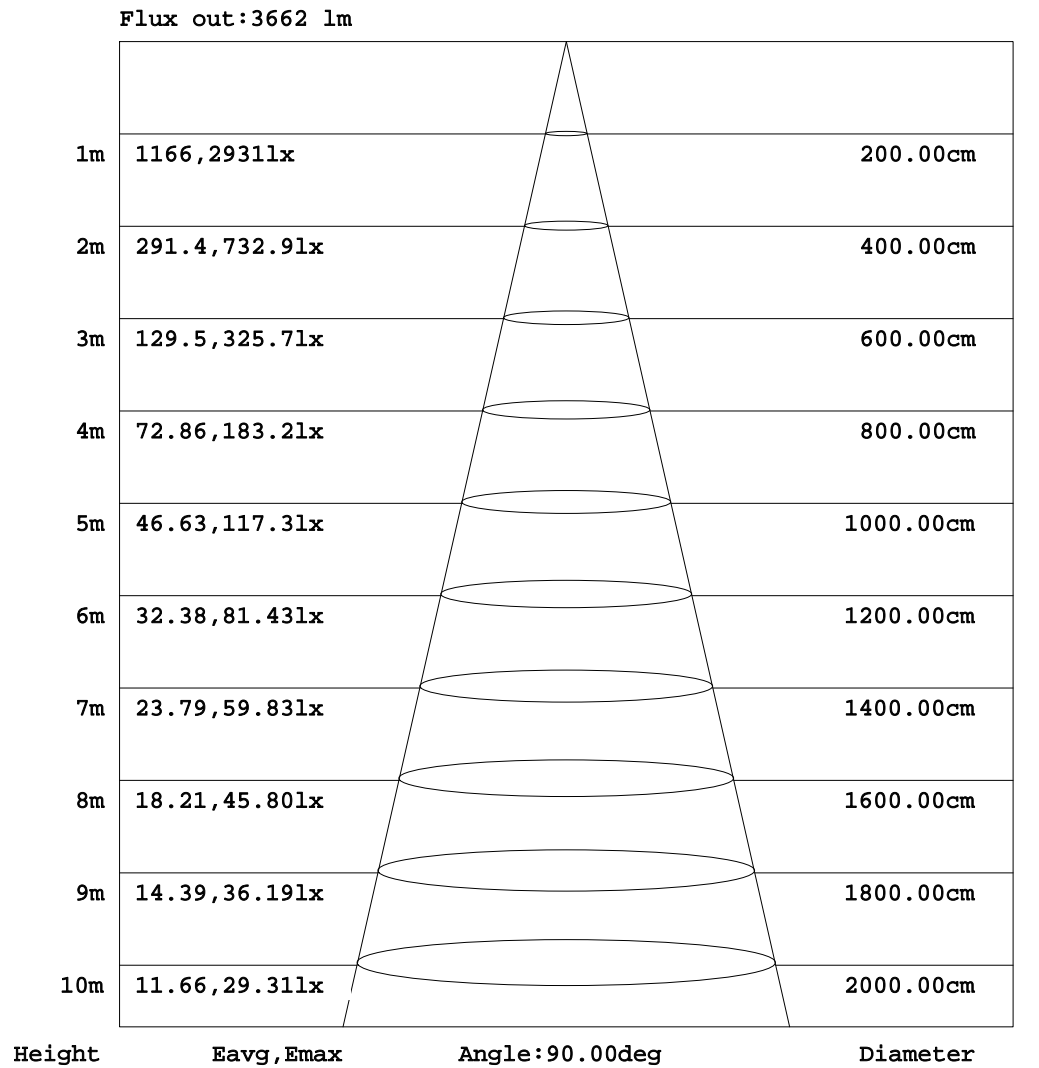


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2021-12-09

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.446
Humidity:65.0%
Test Distance:8.690m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:230.16V I:0.1636A P:35.652W PF:0.9466 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:4222.89x1 lm		
NAME: LED542 W34 (35W 4000K)	TYPE: 35W	WEIGHT:
SPEC.: 4000K	DIM.:	SERIAL No.: #1
MFR.:	SUR.: 0.155	Shielding Angle:

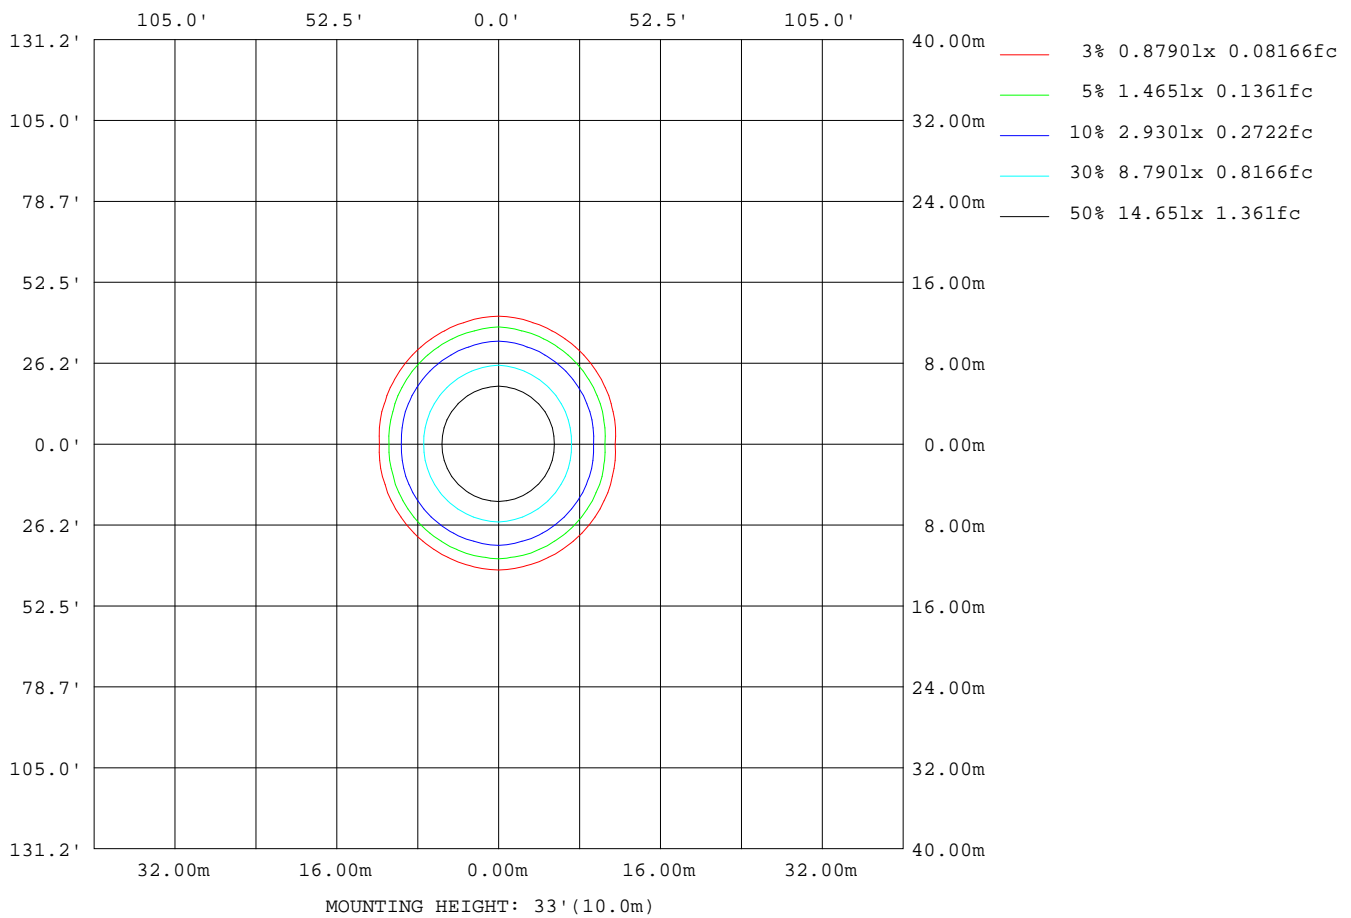

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2021-12-09

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.446
Humidity:65.0%
Test Distance:8.690m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:230.16V I:0.1636A P:35.652W PF:0.9466 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:4222.89x1 lm		
NAME: LED542 W34 (35W 4000K)	TYPE: 35W	WEIGHT:
SPEC.: 4000K	DIM.:	SERIAL No.: #1
MFR.:	SUR.: 0.155	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	1366
L_0~180(75)av	1093
L_0~180(85)av	851
L_90~270(65)av	1484
L_90~270(75)av	1071
L_90~270(85)av	917
L_45(65)av	1442
L_45(75)av	1082
L_45(85)av	899

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2021-12-09

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.446
Humidity:65.0%
Test Distance:8.690m [K=1.0000]
Remarks:

Planar Illuminance Curve

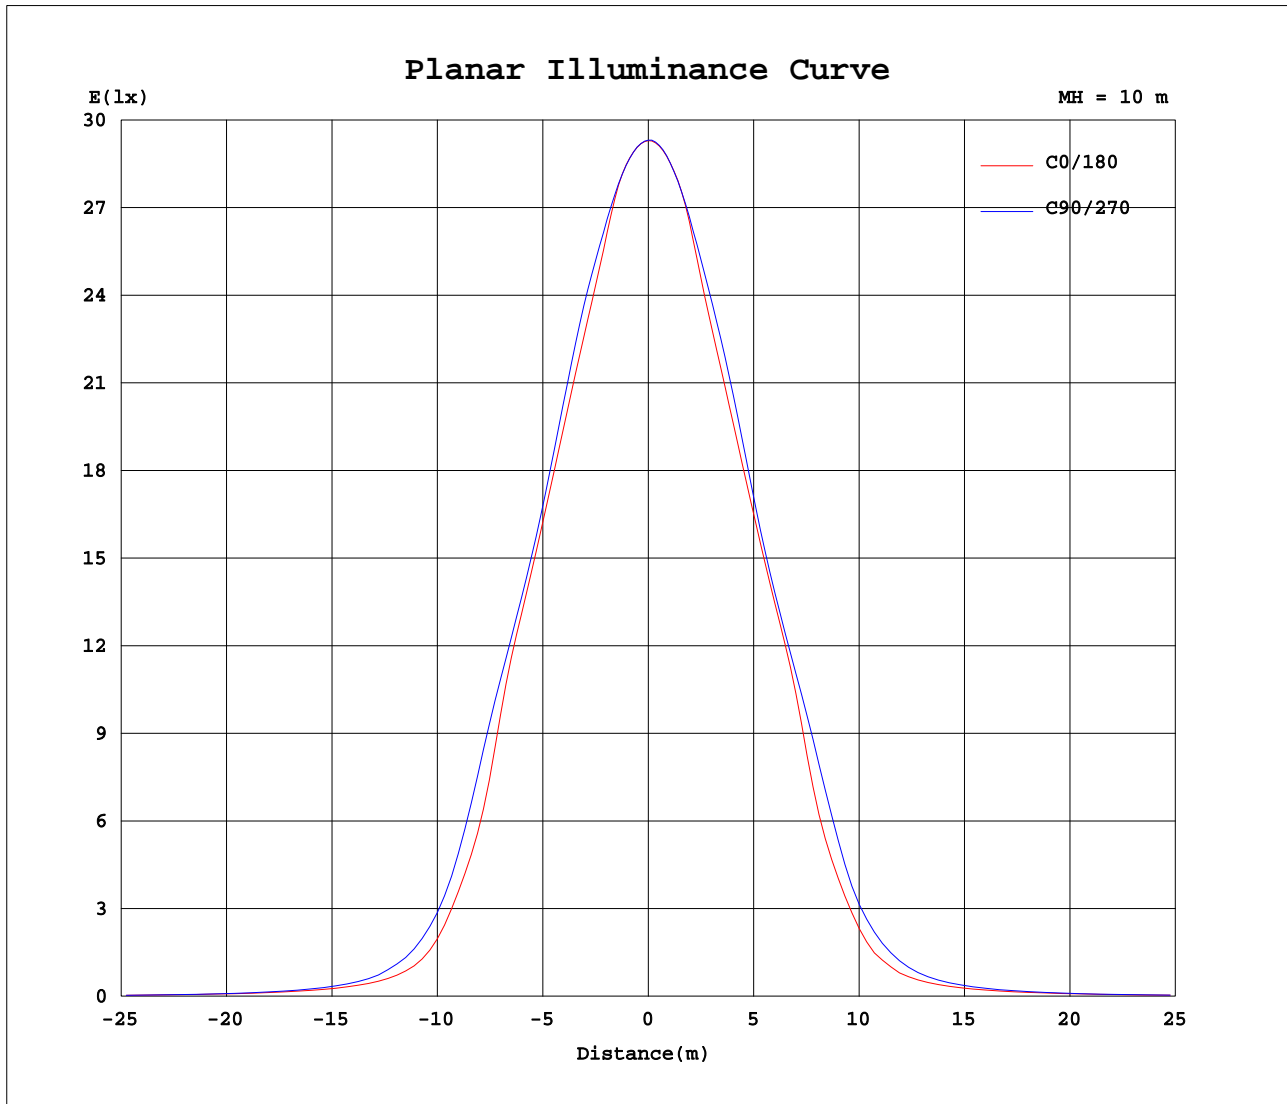

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2021-12-09

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.446
 Humidity: 65.0%
 Test Distance: 8.690m [K=1.0000]
 Remarks:

```

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.446
Humidity:65.0%
Test Distance:8.690m [K=1.0000]
Remarks:

```