
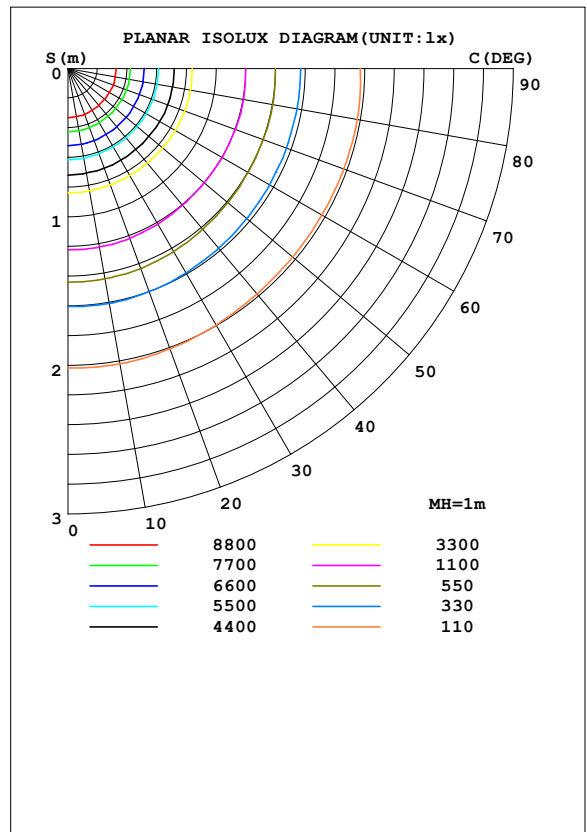


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:240.2V I:0.5694A P:132.6W PF:0.9697 Lamp Flux:23485.4x1 lm		
NAME: P700 4KA - 132W	TYPE:	WEIGHT:
SPEC.:	DIM.: 0.0870000	SERIAL No.:1
MFR.: HALCYON	SUR.:	PROTECTION ANGLE:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 177.13 lm/W			
MODEL		I _{max} (cd)	11032	S/MH (C0/180)	1.23
NOMINAL POWER (W)	132	LOR (%)	100.0	S/MH (C90/270)	1.22
RATED VOLTAGE (V)	240	TOTAL FLUX (lm)	23485	η UP, DN (C0-180)	0.9, 47.2
NOMINAL FLUX (lm)	23485.4	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.8, 51.0
LAMPS INSIDE	1	η up (%)	1.7	CIBSE SHR NOM	1.25
TEST VOLTAGE (V)	240.2	η down (%)	98.3	CIBSE SHR MAX	1.35

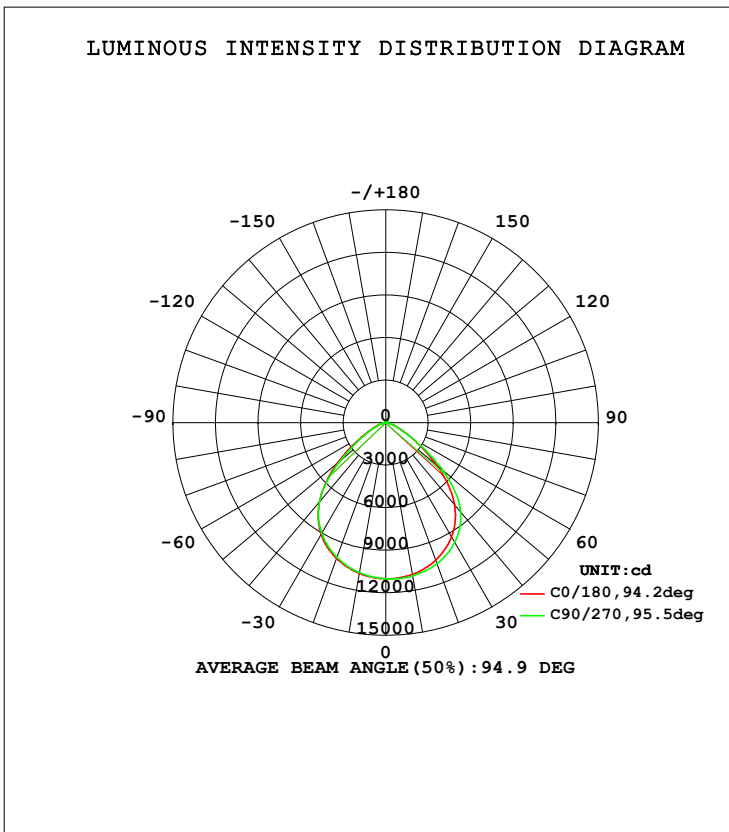

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: 03
 Test Date: 2022-01-08

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.0.281
 Humidity: 60.0%
 Test Distance: 12.020m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	1079	1074	1074	1077	1087	1095	1097	1090	0- 10	1043	1043	4.44,4.44
20	1018	1010	1010	1014	1032	1054	1058	1039	10- 20	2997	4040	17.2,17.2
30	911.4	901.8	902.6	904.0	928.9	964.7	974.1	942.6	20- 30	4538	8578	36.5,36.5
40	726.7	720.4	728.0	720.7	754.8	806.7	821.4	769.4	30- 40	5320	13898	59.2,59.2
50	451.0	424.7	420.6	429.6	474.2	524.1	529.8	487.4	40- 50	4773	18671	79.5,79.5
60	181.9	167.7	162.7	183.2	202.8	213.1	203.7	206.9	50- 60	2811	21481	91.5,91.5
70	62.27	55.91	53.88	61.17	69.30	70.38	65.60	69.15	60- 70	1155	22637	96.4,96.4
80	13.57	12.18	12.04	13.58	16.11	16.94	15.98	15.82	70- 80	369.6	23007	98,98
90	0.7918	0.8242	0.8148	0.8254	0.7667	0.8487	0.8060	0.6822	80- 90	68.56	23075	98.3,98.3
100	1.799	1.920	1.922	1.852	1.585	1.469	1.444	1.529	90-100	12.57	23088	98.3,98.3
110	3.516	3.742	3.770	3.606	3.171	3.010	2.982	3.090	100-110	26.05	23114	98.4,98.4
120	5.762	6.068	6.115	5.883	5.296	5.111	5.087	5.214	110-120	43.83	23158	98.6,98.6
130	8.290	8.602	8.665	8.411	7.668	7.471	7.458	7.589	120-130	60.67	23218	98.9,98.9
140	10.66	10.91	11.01	10.79	10.08	9.850	9.833	9.979	130-140	71.16	23289	99.2,99.2
150	12.83	13.07	13.22	13.05	12.32	12.09	12.04	12.20	140-150	71.91	23361	99.5,99.5
160	15.02	15.26	15.43	15.27	14.61	14.44	14.41	14.54	150-160	63.32	23425	99.7,99.7
170	16.68	16.88	16.99	16.94	16.50	16.45	16.44	16.49	160-170	44.65	23469	99.9,99.9
180	17.14	17.23	17.21	17.30	17.15	17.24	17.22	17.30	170-180	16.19	23485	100,100
DEG	LUMINOUS INTENSITY:×10cd									UNIT:lm		


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:03
 Test Date:2022-01-08

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.281
 Humidity:60.0%
 Test Distance:12.020m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:240.2V I:0.5694A P:132.6W PF:0.9697 Lamp Flux:23485.4x1 lm		
NAME: P700 4KA - 132W	TYPE:	WEIGHT:
SPEC.:	DIM.: 0.0870000	SERIAL No.:1
MFR.: HALCYON	SUR.:	PROTECTION ANGLE:

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															
	Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.10	1.10	1.10	1.05	1.05	1.05	1.00	1.00	1.00	.98
1.0	1.07	1.04	1.01	1.05	1.02	.99	1.00	.98	.96	.96	.94	.92	.92	.91	.89	.87
2.0	.96	.90	.86	.94	.89	.85	.90	.86	.83	.87	.83	.80	.84	.81	.78	.76
3.0	.86	.79	.74	.85	.78	.73	.81	.76	.72	.79	.74	.70	.76	.72	.69	.67
4.0	.78	.70	.64	.76	.69	.64	.74	.68	.63	.71	.66	.62	.69	.65	.61	.59
5.0	.70	.63	.57	.69	.62	.56	.67	.61	.56	.65	.59	.55	.63	.58	.54	.52
6.0	.64	.56	.50	.63	.56	.50	.61	.54	.50	.59	.53	.49	.58	.53	.48	.47
7.0	.58	.51	.45	.58	.50	.45	.56	.49	.44	.54	.48	.44	.53	.48	.44	.42
8.0	.54	.46	.41	.53	.46	.40	.51	.45	.40	.50	.44	.40	.49	.44	.39	.38
9.0	.49	.42	.37	.49	.42	.37	.48	.41	.36	.46	.40	.36	.45	.40	.36	.34
10.0	.46	.38	.34	.45	.38	.33	.44	.38	.33	.43	.37	.33	.42	.37	.33	.31

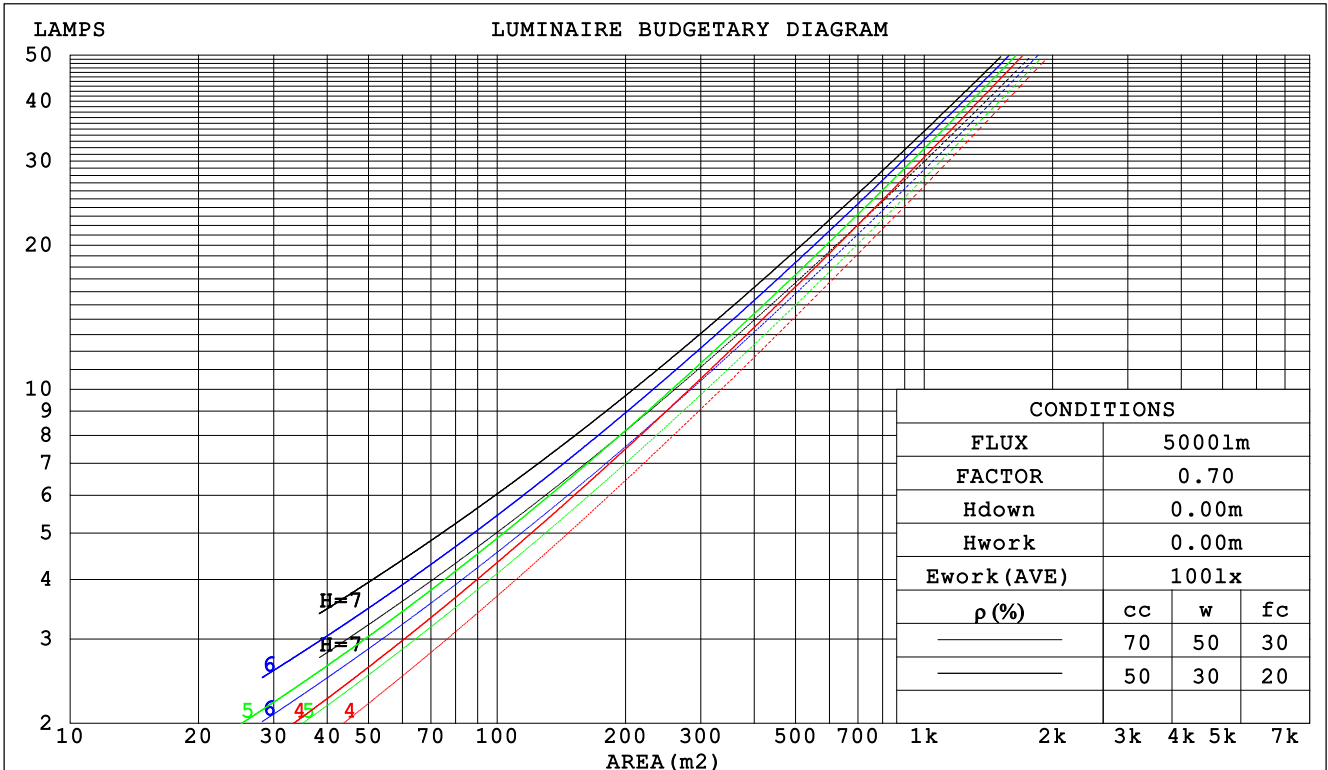

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:03
Test Date:2022-01-08

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.281
Humidity:60.0%
Test Distance:12.020m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:240.2V I:0.5694A P:132.6W PF:0.9697 Lamp Flux:23485.4x1 lm									
NAME: P700 4KA - 132W					TYPE:			WEIGHT:	
SPEC.:					DIM.: 0.0870000			SERIAL No.:1	
MFR.: HALCYON					SUR.:			PROTECTION ANGLE:	

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients (WEC)									
0.0																
1.0	.240	.137	.043	.233	.133	.042	.219	.126	.040	.206	.119	.038	.195	.113	.036	
2.0	.234	.128	.039	.228	.126	.039	.216	.120	.037	.205	.115	.036	.194	.110	.035	
3.0	.223	.119	.036	.218	.117	.035	.207	.112	.034	.197	.108	.033	.188	.104	.032	
4.0	.211	.110	.032	.206	.108	.032	.197	.104	.031	.188	.101	.030	.180	.098	.030	
5.0	.199	.102	.029	.195	.100	.029	.187	.097	.029	.179	.094	.028	.171	.092	.028	
6.0	.188	.094	.027	.184	.093	.027	.177	.091	.026	.170	.088	.026	.163	.086	.025	
7.0	.178	.088	.025	.174	.087	.025	.167	.085	.024	.161	.083	.024	.155	.081	.024	
8.0	.168	.082	.023	.165	.081	.023	.159	.079	.023	.153	.077	.022	.147	.076	.022	
9.0	.159	.077	.021	.156	.076	.021	.151	.074	.021	.145	.073	.021	.140	.071	.021	
10.0	.151	.072	.020	.148	.072	.020	.143	.070	.020	.138	.069	.020	.134	.067	.019	

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients (CCEC)									
0.0	.204	.204	.204	.174	.174	.174	.119	.119	.119	.068	.068	.068	.022	.022	.022	
1.0	.189	.170	.153	.162	.146	.132	.111	.100	.091	.064	.058	.053	.020	.019	.017	
2.0	.178	.146	.118	.153	.125	.102	.105	.087	.071	.060	.050	.042	.019	.016	.014	
3.0	.169	.128	.094	.145	.110	.082	.100	.076	.057	.057	.045	.034	.018	.014	.011	
4.0	.161	.114	.078	.138	.098	.067	.095	.069	.047	.055	.040	.028	.018	.013	.009	
5.0	.154	.103	.065	.132	.089	.057	.091	.062	.040	.053	.037	.024	.017	.012	.008	
6.0	.147	.094	.057	.127	.082	.049	.087	.057	.035	.051	.034	.021	.016	.011	.007	
7.0	.141	.087	.050	.121	.076	.043	.084	.053	.031	.049	.031	.018	.016	.010	.006	
8.0	.135	.082	.045	.117	.071	.039	.081	.050	.028	.047	.029	.016	.015	.010	.005	
9.0	.130	.077	.041	.112	.067	.036	.078	.047	.025	.045	.028	.015	.015	.009	.005	
10.0	.125	.073	.038	.108	.063	.033	.075	.044	.023	.044	.026	.014	.014	.009	.005	

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:03
 Test Date:2022-01-08

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.281
 Humidity:60.0%
 Test Distance:12.020m [K=1.0000]
 Remarks:

Uncorrected UGR Table

Test:U:240.2V I:0.5694A P:132.6W PF:0.9697 Lamp Flux:23485.4x1 lm										
NAME: P700 4KA - 132W					TYPE:			WEIGHT:		
SPEC.:					DIM.: 0.0870000			SERIAL No.:1		
MFR.: HALCYON					SUR.:			PROTECTION ANGLE:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	26.3	27.5	26.5	27.8	28.0	26.0	27.3	26.2	27.5	27.7
3H	26.4	27.6	26.7	27.8	28.1	26.1	27.3	26.4	27.5	27.8
4H	26.4	27.5	26.7	27.8	28.1	26.1	27.2	26.4	27.4	27.7
6H	26.3	27.4	26.7	27.7	28.0	26.0	27.0	26.3	27.3	27.6
8H	26.3	27.3	26.7	27.6	27.9	26.0	27.0	26.3	27.3	27.6
12H	26.3	27.2	26.6	27.5	27.9	25.9	26.9	26.3	27.2	27.5
4H 2H	26.3	27.4	26.6	27.6	27.9	26.0	27.1	26.3	27.4	27.7
3H	26.5	27.4	26.8	27.8	28.1	26.2	27.1	26.6	27.5	27.8
4H	26.5	27.4	26.9	27.7	28.1	26.2	27.1	26.6	27.4	27.8
6H	26.5	27.2	26.9	27.6	28.0	26.2	26.9	26.6	27.3	27.7
8H	26.4	27.2	26.9	27.5	28.0	26.1	26.8	26.6	27.2	27.6
12H	26.4	27.1	26.9	27.5	27.9	26.1	26.7	26.5	27.2	27.6
8H 4H	26.4	27.1	26.9	27.5	27.9	26.1	26.8	26.6	27.2	27.6
6H	26.4	27.0	26.9	27.4	27.9	26.1	26.7	26.6	27.1	27.6
8H	26.4	26.9	26.9	27.4	27.8	26.1	26.6	26.6	27.0	27.5
12H	26.4	26.8	26.9	27.3	27.8	26.1	26.5	26.6	27.0	27.5
12H 4H	26.4	27.0	26.8	27.4	27.9	26.1	26.7	26.5	27.1	27.6
6H	26.4	26.9	26.9	27.3	27.8	26.1	26.6	26.6	27.0	27.5
8H	26.4	26.8	26.9	27.3	27.8	26.1	26.5	26.6	27.0	27.5
Variations with the observer position at spacings:										
S = 1.0H	+ 1.1 / - 1.4					+ 1.2 / - 1.7				
1.5H	+ 0.6 / - 0.9					+ 0.7 / - 1.1				
2.0H	+ 2.4 / - 2.9					+ 2.6 / - 2.8				

CIE Pub.117 Corrected 23485 lm Total Lamp Luminous Flux. (8log(F/F0) = 11.0)

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:03
 Test Date:2022-01-08

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.281
 Humidity:60.0%
 Test Distance:12.020m [K=1.0000]
 Remarks:

UTILIZATION FACTORS TABLE

Test:U:240.2V I:0.5694A P:132.6W PF:0.9697 Lamp Flux:23485.4x1 lm		
NAME: P700 4KA - 132W	TYPE:	WEIGHT:
SPEC.:	DIM.: 0.0870000	SERIAL No.:1
MFR.: HALCYON	SUR.:	PROTECTION ANGLE:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	66	55	49	65	55	49	64	55	49	43
0.80	76	66	60	75	66	60	73	65	59	53
1.00	84	75	69	83	74	69	81	75	68	62
1.25	91	82	77	89	82	76	87	80	75	69
1.50	95	87	82	93	86	81	91	84	80	73
2.00	101	94	89	99	93	88	95	90	87	79
2.50	104	98	93	102	96	92	98	93	90	82
3.00	106	101	97	104	99	95	100	96	93	85
4.00	109	105	101	107	103	100	102	99	97	88
5.00	111	107	104	108	105	102	104	101	99	90
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:03
 Test Date:2022-01-08

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.281
 Humidity:60.0%
 Test Distance:12.020m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:240.2V I:0.5694A P:132.6W PF:0.9697 Lamp Flux:23485.4x1 lm		
NAME: P700 4KA - 132W	TYPE:	WEIGHT:
SPEC.:	DIM.: 0.0870000	SERIAL No.:1
MFR.: HALCYON	SUR.:	PROTECTION ANGLE:

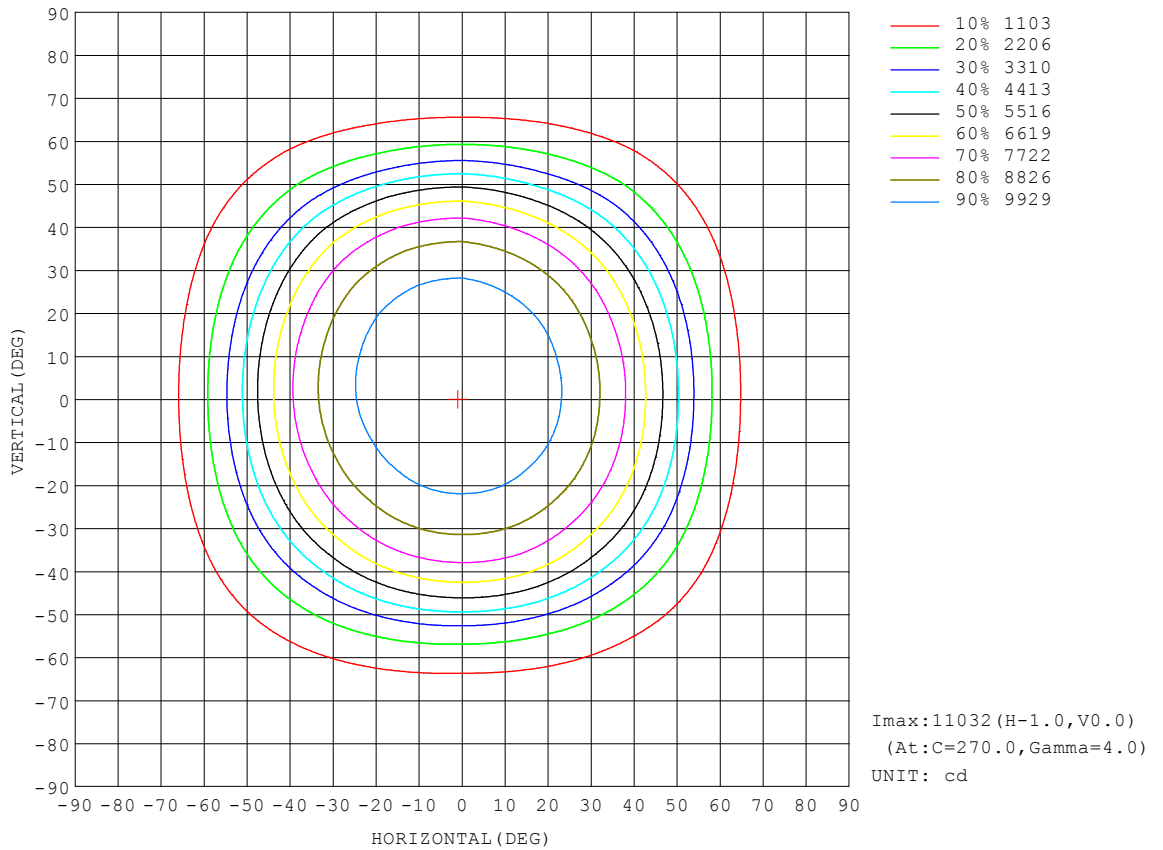


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:03
 Test Date:2022-01-08

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.281
 Humidity:60.0%
 Test Distance:12.020m [K=1.0000]
 Remarks:

AAI Figure

Test:U:240.2V I:0.5694A P:132.6W PF:0.9697 Lamp Flux:23485.4x1 lm		
NAME: P700 4KA - 132W	TYPE:	WEIGHT:
SPEC.:	DIM.: 0.0870000	SERIAL No.:1
MFR.: HALCYON	SUR.:	PROTECTION ANGLE:

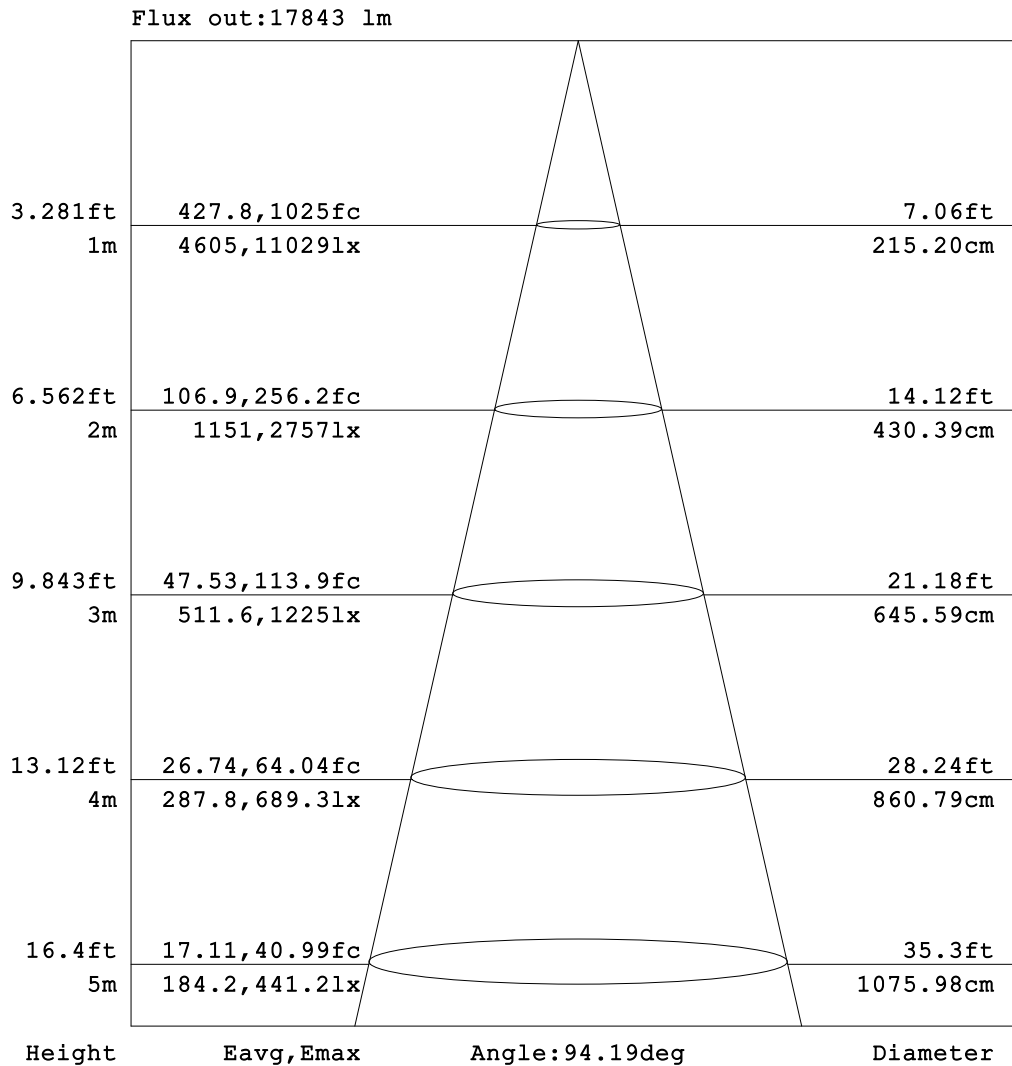


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:03
 Test Date:2022-01-08

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.281
 Humidity:60.0%
 Test Distance:12.020m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM


Test:U:240.2V I:0.5694A P:132.6W PF:0.9697 Lamp Flux:23485.4x1 lm		
NAME: P700 4KA - 132W	TYPE:	WEIGHT:
SPEC.:	DIM.: 0.0870000	SERIAL No.:1
MFR.: HALCYON	SUR.:	PROTECTION ANGLE:

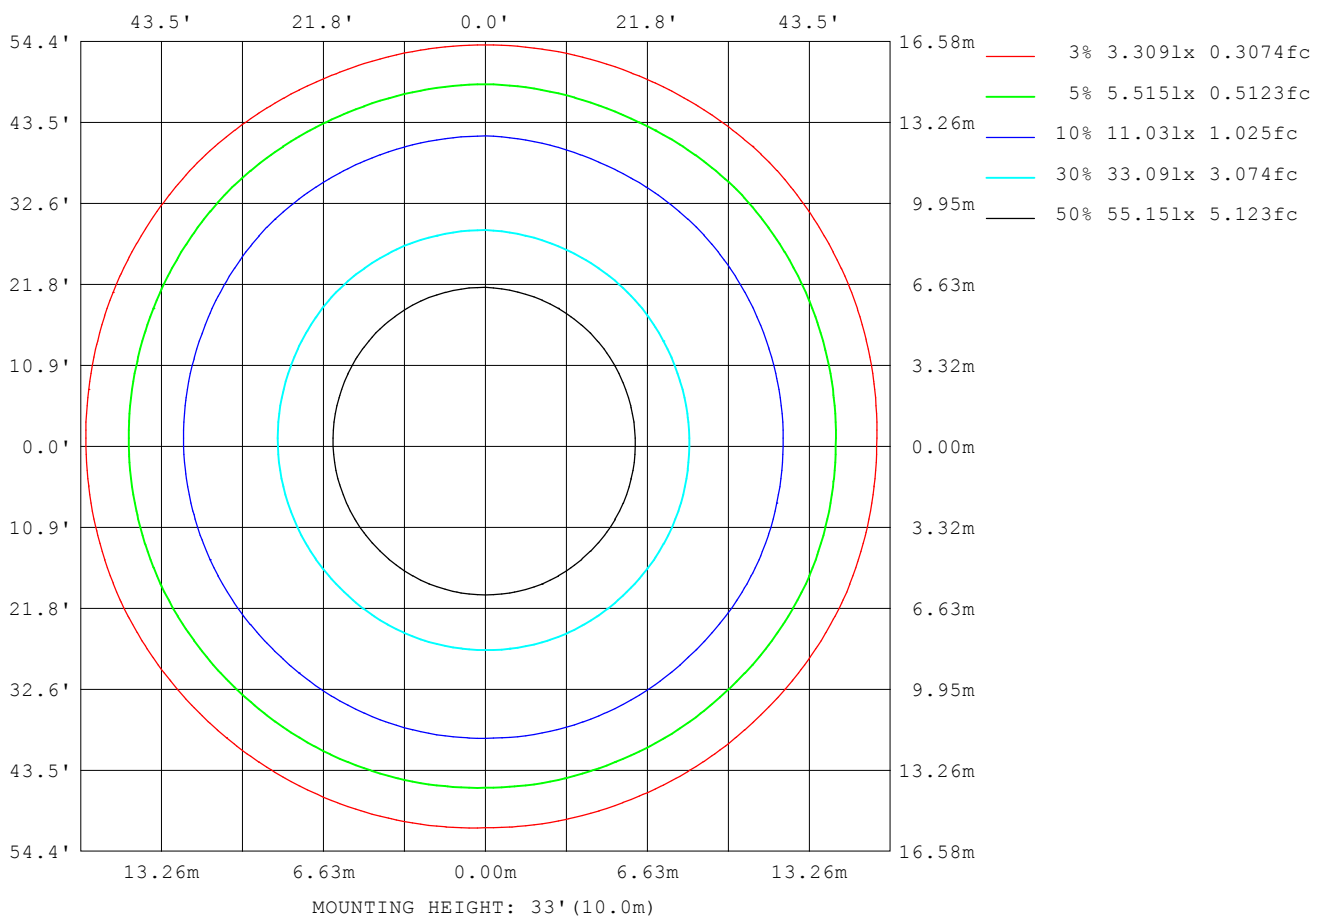

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:03
 Test Date:2022-01-08

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.281
 Humidity:60.0%
 Test Distance:12.020m [K=1.0000]
 Remarks:

Planar Illuminance Curve

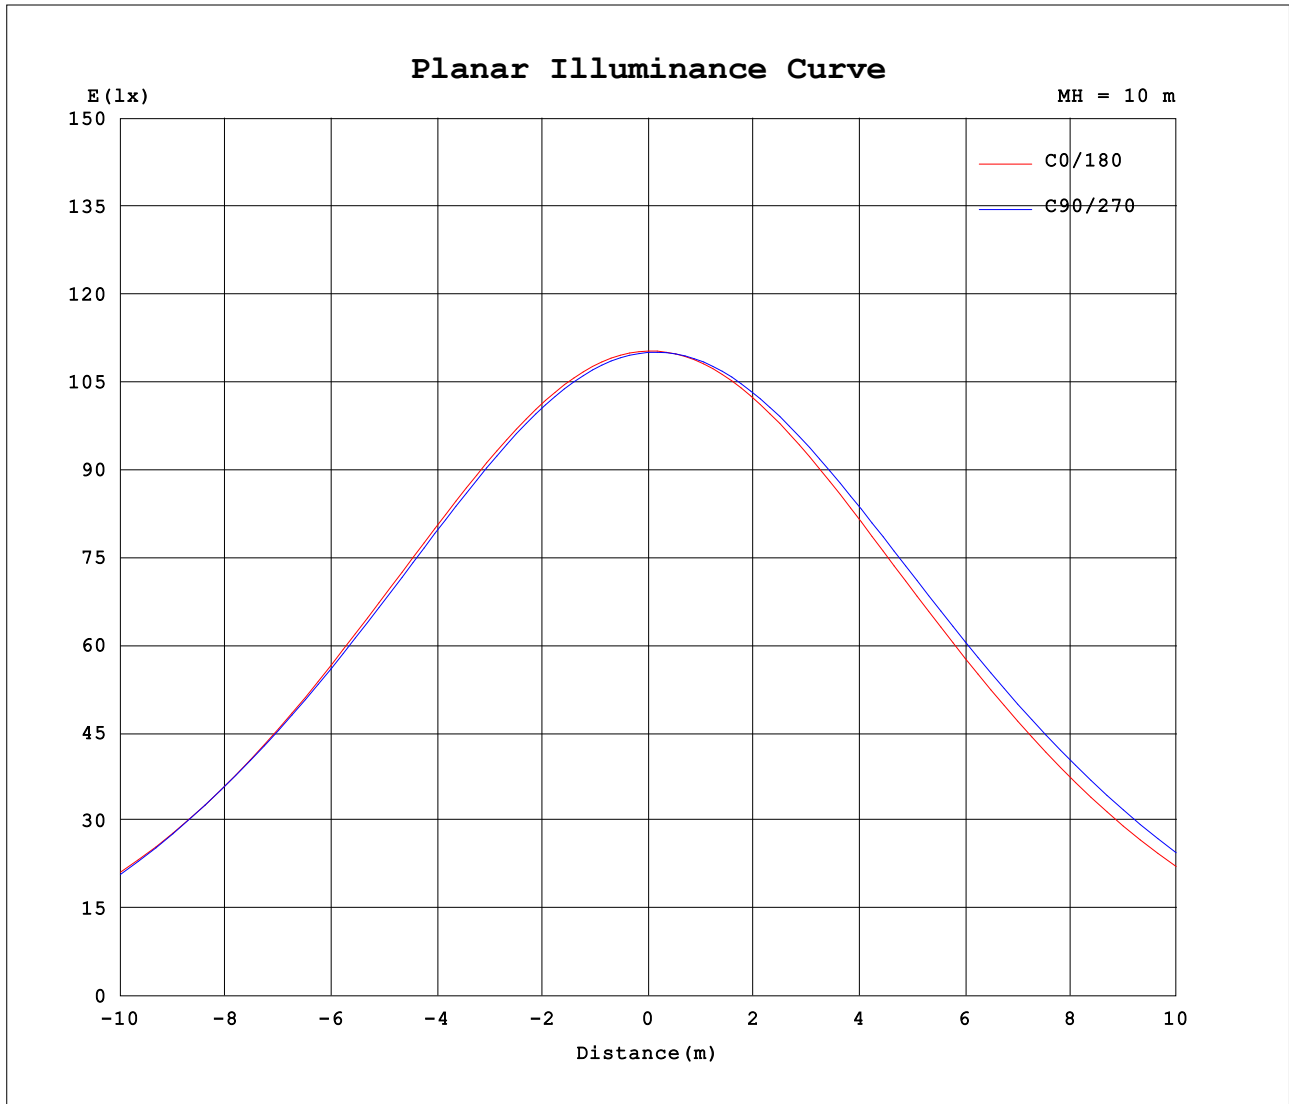

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: 03
 Test Date: 2022-01-08

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.0.281
 Humidity: 60.0%
 Test Distance: 12.020m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:240.2V I:0.5694A P:132.6W PF:0.9697 Lamp Flux:23485.4x1 lm		
NAME: P700 4KA - 132W	TYPE:	WEIGHT:
SPEC.:	DIM.: 0.0870000	SERIAL No.:1
MFR.: HALCYON	SUR.:	PROTECTION ANGLE:

Table--1

UNIT: x10cd

C (DEG) \ γ (DEG)	0	23	45	68	90	113	135	158	180	203	225	248	270	293	315	338			
0	1101	1101	1101	1101	1101	1101	1101	1101	1101	1101	1101	1101	1101	1101	1101	1101			
5	1095	1094	1092	1092	1092	1093	1094	1096	1099	1101	1102	1103	1103	1102	1100	1097			
10	1079	1076	1074	1074	1074	1076	1077	1082	1087	1091	1095	1096	1097	1093	1090	1084			
15	1054	1051	1047	1048	1047	1049	1051	1057	1065	1072	1079	1082	1082	1076	1070	1061			
20	1018	1014	1010	1011	1010	1012	1014	1021	1032	1042	1054	1058	1058	1049	1039	1028			
25	972	967	963	964	962	964	965	974	987	1001	1016	1023	1023	1010	998	983			
30	911	906	902	904	903	904	904	914	929	945	965	974	974	958	943	924			
35	830	826	824	829	827	828	826	837	854	873	897	909	909	890	870	845			
40	727	724	720	730	728	726	721	735	755	778	807	820	821	795	769	742			
45	598	593	585	591	589	588	586	602	626	651	684	696	695	664	639	613			
50	451	444	425	423	421	427	430	452	474	495	524	529	530	502	487	468			
55	298	292	273	264	266	276	287	308	322	334	347	344	349	331	332	315			
60	182	179	168	165	163	172	183	196	203	210	213	202	204	203	207	196			
65	107	104	97.9	97.9	95.1	102	108	116	121	125	126	119	117	120	122	115			
70	62.3	59.8	55.9	56.7	53.9	59.3	61.2	65.6	69.3	70.9	70.4	67.3	65.6	68.7	69.2	65.9			
75	30.6	29.2	28.4	27.8	27.8	28.6	30.6	33.7	36.4	37.8	37.6	36.0	35.6	36.6	35.9	33.2			
80	13.6	12.8	12.2	12.3	12.0	12.7	13.6	14.9	16.1	16.8	16.9	16.1	16.0	16.0	15.8	14.7			
85	5.42	4.93	4.42	4.46	4.37	4.78	5.39	6.43	7.10	7.20	7.02	6.45	6.65	6.46	6.40	5.87			
90	0.79	0.80	0.82	0.80	0.81	0.81	0.83	0.81	0.77	0.78	0.85	0.78	0.81	0.70	0.68	0.72			
95	1.20	1.24	1.27	1.26	1.26	1.24	1.23	1.19	1.05	1.02	0.96	0.96	0.94	0.98	1.01	1.08			
100	1.80	1.85	1.92	1.91	1.92	1.87	1.85	1.78	1.59	1.53	1.47	1.45	1.44	1.48	1.53	1.61			
105	2.58	2.65	2.75	2.76	2.77	2.69	2.65	2.54	2.29	2.23	2.15	2.14	2.12	2.18	2.22	2.33			
110	3.52	3.62	3.74	3.76	3.77	3.68	3.61	3.48	3.17	3.10	3.01	3.00	2.98	3.04	3.09	3.22			
115	4.59	4.71	4.87	4.90	4.90	4.79	4.70	4.54	4.18	4.09	4.00	3.99	3.98	4.04	4.10	4.24			
120	5.76	5.90	6.07	6.11	6.12	5.99	5.88	5.71	5.30	5.21	5.11	5.10	5.09	5.16	5.21	5.37			
125	7.01	7.15	7.33	7.37	7.38	7.25	7.13	6.94	6.48	6.38	6.28	6.28	6.26	6.33	6.39	6.57			
130	8.29	8.43	8.60	8.65	8.67	8.53	8.41	8.21	7.67	7.57	7.47	7.47	7.46	7.53	7.59	7.77			
135	9.53	9.66	9.82	9.85	9.88	9.76	9.65	9.45	8.87	8.76	8.67	8.66	8.64	8.72	8.80	8.97			
140	10.7	10.8	10.9	11.0	11.0	10.9	10.8	10.6	10.1	9.96	9.85	9.85	9.83	9.92	9.98	10.2			
145	11.8	11.8	12.0	12.0	12.1	12.0	11.9	11.7	11.2	11.1	11.0	10.9	11.0	11.0	11.1	11.3			
150	12.8	12.9	13.1	13.1	13.2	13.1	13.1	12.9	12.3	12.2	12.1	12.1	12.0	12.1	12.2	12.4			
155	14.0	14.1	14.2	14.3	14.4	14.3	14.2	14.1	13.5	13.4	13.3	13.2	13.2	13.3	13.4	13.5			
160	15.0	15.1	15.3	15.4	15.4	15.4	15.3	15.2	14.6	14.5	14.4	14.4	14.4	14.5	14.5	14.6			
165	16.0	16.0	16.2	16.3	16.4	16.3	16.2	16.1	15.7	15.6	15.5	15.5	15.6	15.6	15.6	15.7			
170	16.7	16.7	16.9	17.0	17.0	16.9	16.9	16.9	16.5	16.5	16.4	16.4	16.4	16.5	16.5	16.5			
175	17.1	17.1	17.2	17.2	17.2	17.2	17.3	17.2	17.0	17.0	17.0	16.9	16.9	17.0	17.1	17.1			
180	17.1	17.2	17.2	17.2	17.2	17.2	17.3	17.3	17.1	17.2	17.2	17.2	17.2	17.2	17.3	17.3			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:03
 Test Date:2022-01-08

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.281
 Humidity:60.0%
 Test Distance:12.020m [K=1.0000]
 Remarks: