



Monolith

Exterior Bollard

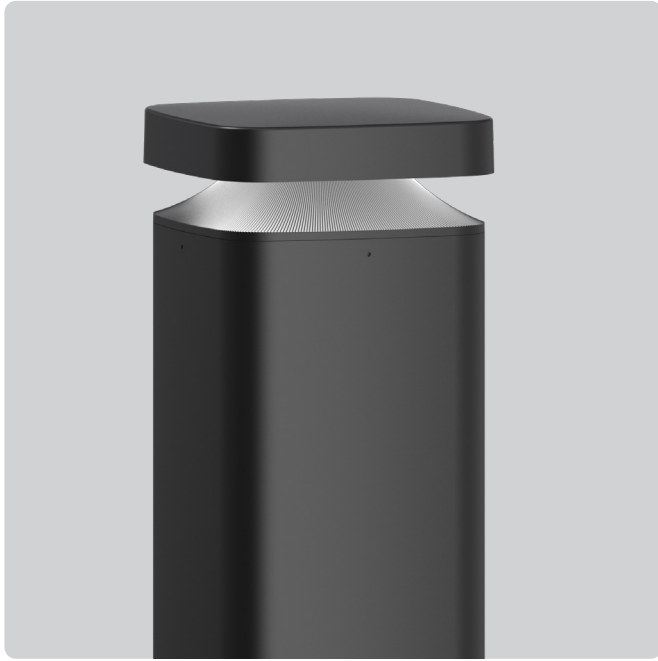


X451 250mm **X452** 600mm **X453** 1000mm

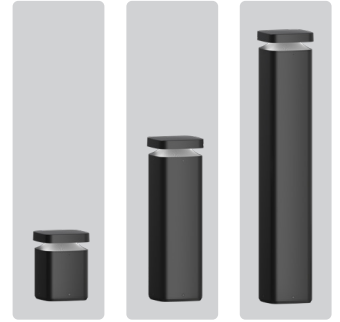

Specifications

Dimensions	L180mm x W180mm. H250, 600 or 1000mm
Input	240V AC
Watts	24W
Colour Temp	3000K
Lumens	180°: 895lm, 360°: 1015lm
CRI	>80
Lifespan	54,000hrs (L70 B50)
Beam Angle	180° or 360°
Binning	3-step SDCM
Finish	Black
Material	6063 Aluminium
IP Rating	IP65
IK Rating	IK08
Driver	Incorporated, non-dimmable or Dali dimmable
TLAs	"Flicker-free", Pst≤1.0; SVM ≤0.4
Electrical Class	Class I luminaire, requires earth
Application	Exterior
Working Temp	-30°C...+45°C
Warranty	5 Year Warranty



Black

Optional Accessories

Description	Code
J-Bolt Anchor Kit	X450-JBA


Coating Technical Detail

1000 hours salt spray tested.
Corrosivity Category as per ISO 12944-2
C4 - High (15 to 25 years).
C5 - Medium (7 to 15 years)



Available In

Description	Code
X451	
250mm, Non-dimmable, 240V AC, 180°	X451-B3K-180D
250mm, Non-dimmable, 240V AC, 360°	X451-B3K-360D
250mm, Dali Dimmable, 240V AC, 180°	X451-B3K-DD-180D
250mm, Dali Dimmable, 240V AC, 360°	X451-B3K-DD-360D
X452	
600mm, Non-dimmable, 240V AC, 180°	X452-B3K-180D
600mm, Non-dimmable, 240V AC, 360°	X452-B3K-360D
600mm, Dali Dimmable, 240V AC, 180°	X452-B3K-DD-180D
600mm, Dali Dimmable, 240V AC, 360°	X452-B3K-DD-360D
X453	
1000mm, Non-dimmable, 240V AC, 180°	X453-B3K-180D
1000mm, Non-dimmable, 240V AC, 360°	X453-B3K-360D
1000mm, Dali Dimmable, 240V AC, 180°	X453-B3K-DD-180D
1000mm, Dali Dimmable, 240V AC, 360°	X453-B3K-DD-360D



Dimensions

