


R771



Exterior Recessed Fixed Downlight Kit
LEDE Economy Select 3K/4K

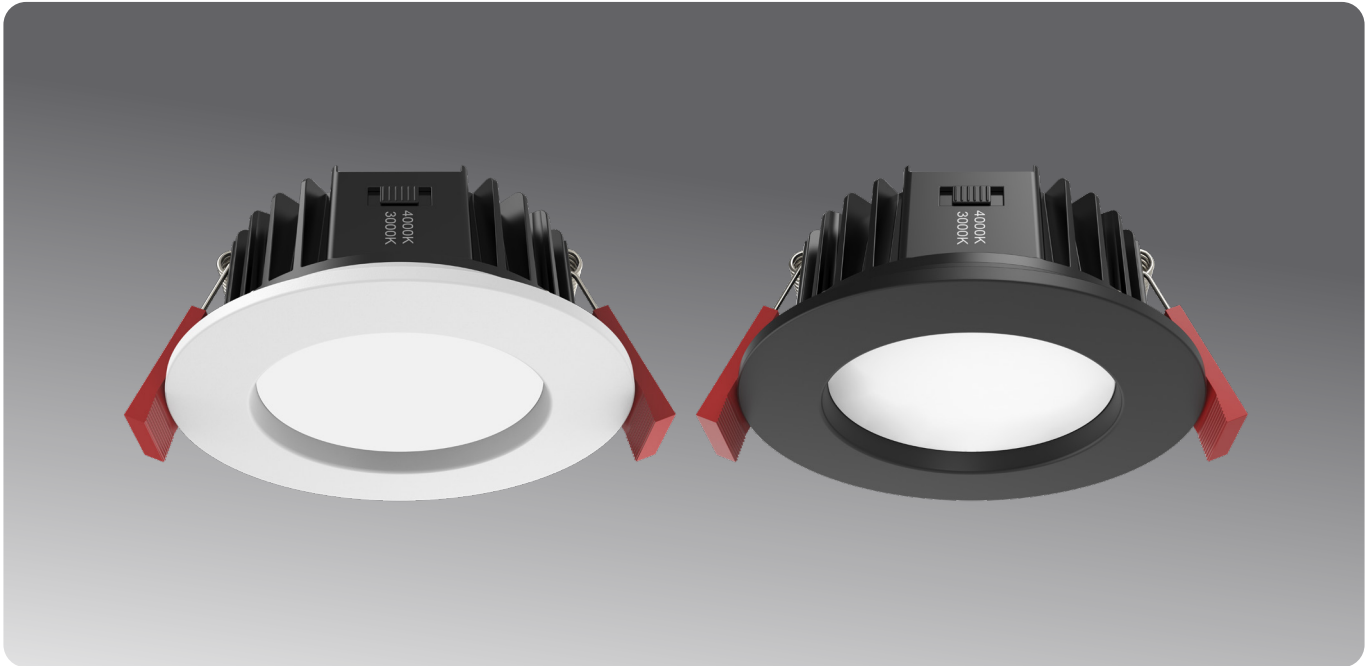

SPECIFICATIONS

DIMENSIONS	D103 x H43mm
CUT OUT	Ø 92mm
COLOUR TEMP	Selectable 3000K or 4000K
LUMENS	White: 3000K/780lm, 4000K/870lm Black: 3000K/730lm, 4000K/780lm
CRI	90
LIFESPAN	>60,000 hours (L80 B10)
BEAM ANGLE	90°
MATERIAL	PC Trim/diffuser (UV Stable), Aluminium, ADC12
IP RATING	IP65 (from below)
CLEARANCE	25mm recommended for optimum lifespan. 0mm required. Rear of fitting may abut structural members and building elements.
CLASSIFICATION	IC-F Rated
DRIVER	DX Series Under Insulation Dimmable TRIAC Driver Included (pre-wired) 180mA
APPLICATION	Exterior
WARRANTY	5 Year Warranty

<870 LUMENS	8 WATTS	AC 240V
-----------------------	----------------	----------------

	UID™ Dimmable Under Insulation Driver Included
---	--

AVAILABLE IN select CCT

DESCRIPTION	CODE
Black "Select" 3000K/4000K	R771 XB34A
White "Select" 3000K/4000K	R771 XW34A



Corrosion Proof
 UV Stable PC construction,
 designed for rugged coastal exterior environments.