


Cabinet & Display

Interior



R708 Ultra Shallow Wide Beam

Dimensions D42 x H12mm	Cut Out Ø 35mm
Watts 1.2W	Lumens 70lm
Beam 60°	

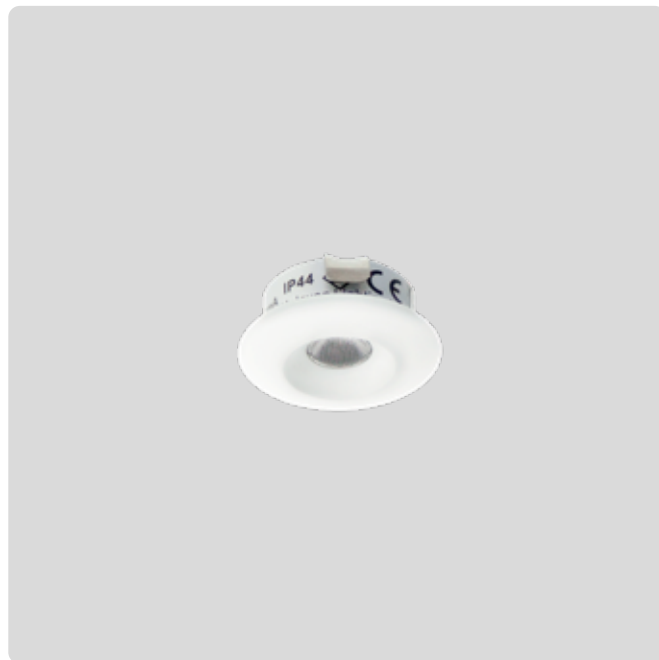


R701 Ultra Shallow Narrow Beam

Dimensions D36 x H15mm	Cut Out Ø 27mm
Watts 1.2W	Lumens 95lm
Beam 22°	



R710 Wide Beam

Dimensions D42 x H22mm	Cut Out Ø 37mm
Watts 1.2W	Lumens 70lm
Beam 60°	

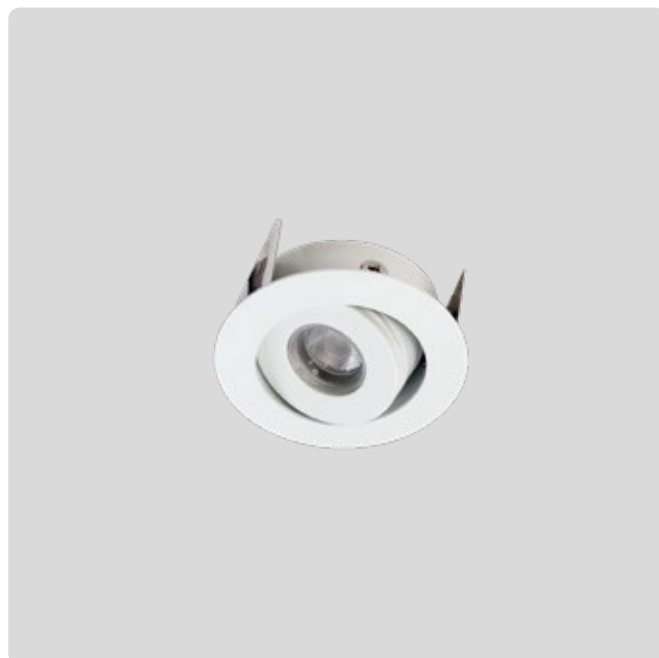


R711 Tilt Wide Beam

Dimensions D52 x H22mm	Cut Out Ø 46mm
Watts 1.2W	Lumens 70lm
Beam 60°	Tilt 30°

Specifications

Input	350mA DC Constant Current
Colour Temp	3000K
CRI	R708, R710, R711: CRI90, R701: CRI80
Lifespan	50,000hrs
Binning	SDCM 3
Material	Aluminium
IP Rating	R708, R710, R711: IP20, R701: IP44
Classification	IC Rated
Driver	Sold separately
Dimming/Control	Dimmable
Application	Interior, recessed, suitable for zero clearance installs
Warranty	5 Year Warranty

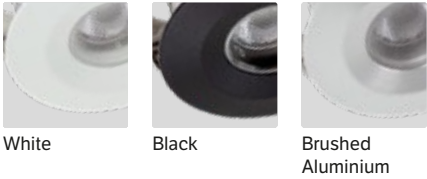

Available In

Description	Code
R708 - Ultra Shallow Wide Beam	
Brushed Aluminium	R708 BA
White	R708 W
R701 - Ultra Shallow Narrow Beam	
White	R701 W
R710 - Fixed Wide Beam	
White	R710 WWL
Black	R710 B3
Brushed Aluminium	R710 BAWL
R711 - Tilt Wide Beam	
White	R711 WWL
Black	R711 B3



R719	Mini Ultra Shallow Fixed
Dimensions D25 x H15mm	Cut Out Ø 20mm
Watts 1.2W	Lumens 75lm
Beam 60°	

Specifications

Input	350mA DC Constant Current
Colour Temp	3000K
CRI	80
Lifespan	>42,000hrs (L70 B10)
Binning	SDCM 3
Material	Aluminium
Classification	IC Rated
Driver	Sold separately
Dimming/Control	Dimmable
Application	Interior, recessed, suitable for zero clearance installs
Warranty	5 Year Warranty



Available In

Description	Code
R719 - Mini	
White	R719 WL
Black	R719 B3



R781 Semi Narrow Beam Fixed

Dimensions D41 x H21mm	Cut Out Ø 37mm
Watts 3W	Lumens 120lm
Beam 36°	



R782 Semi Narrow Beam Tilt

Dimensions D52 x H25mm	Cut Out Ø 46mm
Watts 3W	Lumens 120lm
Beam 36°	Tilt 30°

Specifications

Input	700mA DC Constant Current
Colour Temp	3000K
CRI	90
Lifespan	50,000hrs
Binning	SDCM 3
Material	Aluminium
IP Rating	IP20
Classification	IC Rated
Driver	Sold separately
Dimming/Control	Dimmable
Application	Interior, recessed, suitable for zero clearance installs
Warranty	5 Year Warranty



White



Brushed Aluminium

Available In

Description	Code
R781 - Fixed	
White	R781 WW
Brushed Aluminium	R781 BAW
R782 - Tilt	
White	R782 WW
Brushed Aluminium	R782 BAW



R681	350mA DC
Dimensions D70 x H15mm	Cut Out Ø 58mm
Watts 3W	Lumens 290lm
Beam 120°	



R681	12V AC/DC
Dimensions D70 x H15mm	Cut Out Ø 58mm
Watts 2W	Lumens 170lm
Beam 120°	

Specifications

Input	350mA DC: Constant Current or 12V AC/DC: Constant Voltage
Colour Temp	3000K or 4000K
CRI	82
Lifespan	50,000hrs
Material	Aluminium
Classification	IC Rated
Driver/Trans	Sold separately
Dimming/Control	350mA DC: Dimmable. 12V AC/DC: Non-dimmable
Application	Interior, recessed, suitable for zero clearance installs
Warranty	5 Year Warranty



Available In

Description	Code	
R681 - 350mA CC	3000K	4000K
White	R681 WWL3	R681 WNL3
Silver	R681 SWL3	R681 SNL3
Black	R681 BWL3	R681 BNL3
Brushed Chrome	R681 BCWL3	

Description	Code	
R681 - 12V AC/DC CV	3000K	4000K
White	R681 WWL	R681 WNL
Silver	R681 SWL	R681 SNL
Black	R681 BWL	R681 BNL
Brushed Chrome	R681 BCWL	R681 BCNL

Installation Note: If pairing 12V AC/DC R681 with ULTRA70W/105W, do not exceed 3 fittings per transformer.




R744 Fixed

Dimensions D50 x H30mm	Cut Out Ø 38mm
Watts 3.3W	Lumens 330lm
Beam 35°	

Specifications

Input	350mA DC Constant Current
Colour Temp	3000K
CRI	80
Lifespan	50,000hrs
Binning	SDCM 3
Material	Aluminium, 316 STS or Copper
IP Rating	IP44
Clearance	0mm, zero clearance required
Classification	IC Rated
Driver	Sold separately
Dimming/Control	Dimmable
Application	Interior or exterior, recessed, suitable for zero clearance installs
Warranty	5 Year Warranty

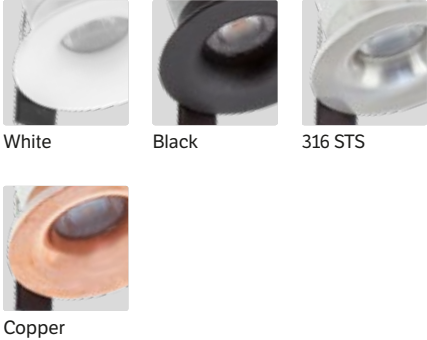

Available In

Description	Code
R744 - Fixed	
White	R744 W3
Black	R744 B3
Copper	R744 CO3
316 STS	R744 STS3



R721 Fixed

Dimensions D64 x H53mm	Cut Out Ø 56mm
Watts 3W	Lumens 110lm
Beam 80°	

Specifications

Input	700mA DC Constant Current
Colour Temp	3000K
CRI	90
Lifespan	50,000hrs
Binning	SDCM 3
Material	Aluminium
IP Rating	IP65
Classification	IC-F Rated
Clearance	0mm, zero clearance required
Driver	Sold separately
Dimming/Control	Dimmable
Application	Interior or exterior, recessed
Warranty	5 Year Warranty



White



Brushed Aluminium

Available In

Description	Code
R721 - Fixed	
White	R721 W
Brushed Aluminium	R721 BA



R674	Tilt/Rotate
Dimensions D75 x H33.5mm	Cut Out Ø 64mm
Watts 3.25W	Lumens 304lm
Beam 42°	Tilt 90° Rotate 355°

Specifications

Input	350mA DC Constant Current
Colour Temp	3000K
CRI	80
Lifespan	50,000hrs (L80)
Binning	SDCM 3
Material	Aluminium
Classification	IC Rated
Driver	Sold separately
Dimming/Control	Dimmable
Application	Interior, recessed, suitable for zero clearance installs
Warranty	5 Year Warranty



White

Available In

Description	Code
R674 - Tilt/Rotate	
White	R674 WL

Larger 9.5W version available R693, see page 88.




R687	Mini
Dimensions D45 x H35mm	Cut Out Ø 38mm
Watts 2.4W	Lumens 126lm
Beam 22°	Tilt 20° Gimbal 360°



R688	Small
Dimensions D60 x H37mm	Cut Out Ø 52mm
Watts 3W	Lumens 320lm
Beam 42°	Tilt 25° Gimbal 360°

Specifications

Input	R687: 700mA DC Constant Current R688: 350mA DC Constant Current
Colour Temp	3000K
CRI	90
Lifespan	50,000hrs (L70)
Binning	SDCM 3
Material	Aluminium
Classification	IC Rated
Driver	Sold separately
Dimming/Control	Dimmable
Application	Interior, recessed, suitable for zero clearance installs
Warranty	5 Year Warranty

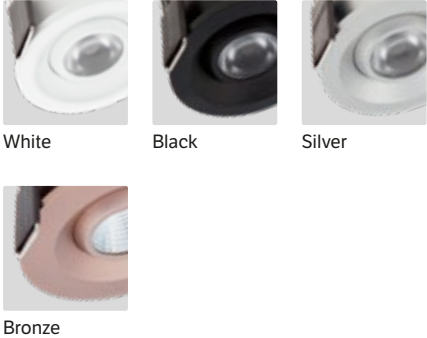

Available In

Description	Code
R687 - Mini	
White	R687 WWL
Black	R687 BLWL
Silver	R687 SWL
R688 - Small	
White	R688 WWL
Black	R688 BLWL
Bronze	R688 BRWL



R798	Mini
Dimensions D60 x H61mm	Cut Out Ø 50mm
Watts 3W	Lumens 135lm
Beam 36°	Tilt 90° Rotate 355°



R799	Standard
Dimensions D80 x H92mm	Cut Out Ø 68mm
Watts 6W	Lumens 640lm
Beam 50°	Tilt 90° Rotate 355°

Specifications

Input	R798: 700mA DC Constant Current R799: 350mA DC Constant Current
Colour Temp	3000K
CRI	90
Lifespan	50,000hrs
Binning	SDCM 3
Cut Off Angle	30° (R798 Low Glare)
Material	Aluminium
IP Rating	IP20
Classification	IC Rated
Driver	Sold separately
Dimming/Control	Dimmable
Application	Interior, recessed
Warranty	5 Year Warranty



Available In

Description	Code
R798 - Mini	
White	R798 W3
Black	R798 B3
R799 - Standard	
White	R799 W3
Black	R799 B3



Accessories

Description	Code
R799 - Standard	
R799 Honeycomb	R799 HC



S368	Single
Dimensions Rod: L250mm. Spot: Ø27mm	Cut Out Ø 12mm
Watts 3W	Lumens 120lm
Beam 36°	Tilt 90° Rotate 355°



S368	Double
Dimensions Rod: L250mm. Spot: Ø27mm	Cut Out Ø 12mm
Watts 2x 3W	Lumens 2x 120lm
Beam 36°	Tilt 90° Rotate 355°

Specifications

Input	700mA DC Constant Current
Colour Temp	4000K
CRI	90
Lifespan	50,000hrs
Binning	SDCM 3
Cut off Angle	30° (Low Glare)
Material	Aluminium
Classification	IC Rated
Driver	Sold separately
Dimming/Control	Dimmable
Application	Interior only
Warranty	5 Year Warranty



Black

Available In

Description	Code
S368 - Tilt/Rotate	
Black Single	S368 1DR4B
Black Double	S368 2DR4B