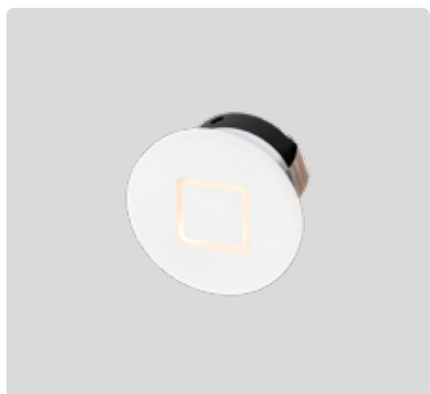
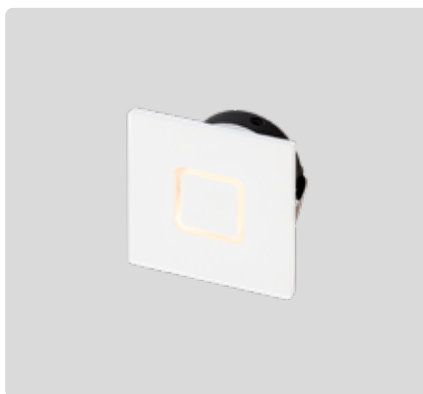
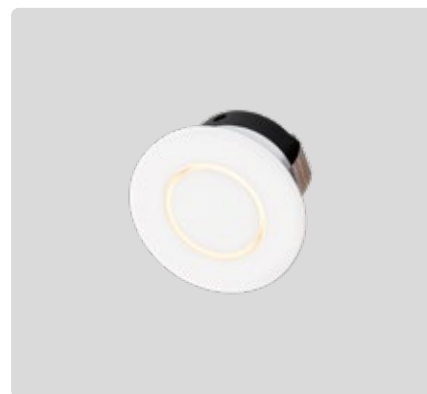
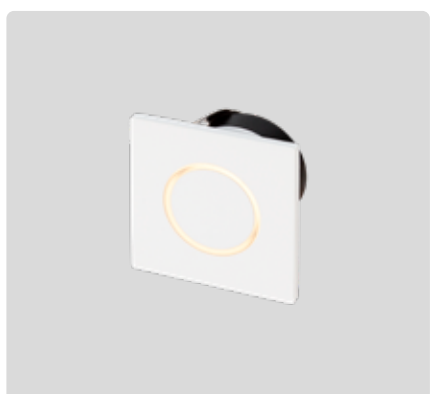
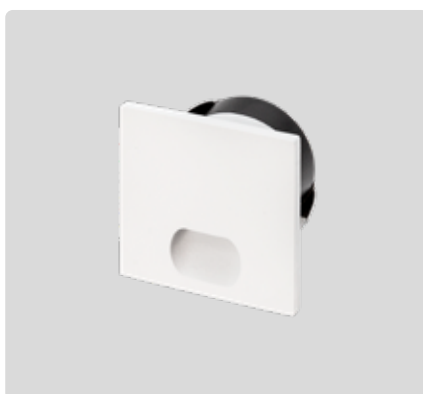


Step

Interior


**R940** Round/Square effect**R941** Square/Square effect**R942** Round/Round effect**R943** Square/Round effect**R944** Slot Round**R945** Slot Square**R946** Directional Round**R947** Directional Square**R948** Directional Pin Round**R949** Directional Pin Square**R950** Halo

Specifications

Watts	1.05W
Input	350mA DC Constant Current
Dimensions	R940 R942 R944 R946 R948: D45 x H26mm R941 R943 R945 R947 R949: L45 x W45 x H26mm R950: D44 x H35mm
Cutout	Ø 35mm
Colour Temp	3000K
Lumens	R940 R941 R942 R943 R950: 30lm R944 R945 R946 R947 R948 R949: 50lm
CRI	90
Lifespan	50,000hrs (L70)
Beam	R940 R941 R942 R943: 100° R944 R945 R946 R947 R948 R949: 45° R950: 360°
Material	Aluminium
IP Rating	IP40
Classification	IC-F Rated
Driver	Sold separately
Dimming/Control	Dimmable
Application	Interior, recessed
Warranty	5 Year Warranty



White



Black

Installation Notes

R946, R947, R948 and R949 fittings have been designed to be installed at approximately 300mm above finished floor level, it is recommended to trial the install height to get the desired effect on the floor before cutting the holes.

Available In

Description	Code
R940 - Round/Square effect	
White	R940 W3
Black	R940 B3
R941 - Square/Square effect	
White	R941 W3
Black	R941 B3
R942 - Round/Round effect	
White	R942 W3
Black	R942 B3
R943 - Square/Round effect	
White	R943 W3
Black	R943 B3
R944 - Slot Round	
White	R944 W3
Black	R944 B3
R945 - Slot Square	
White	R945 W3
Black	R945 B3

Description	Code
R946 - Directional Round	
White	R946 W3
Black	R946 B3
R947 - Directional Square	
White	R947 W3
Black	R947 B3
R948 - Directional Pin Round	
White	R948 W3
Black	R948 B3
R949 - Directional Pin Square	
White	R949 W3
Black	R949 B3
R950 - Halo	
White	R950 W3
Black	R950 B3



R951	Standard
Dimensions L80 x W40 x D31mm	Cut Out 70 x 35mm
Watts 1.05W	Lumens 50lm
Beam 45°	



R952	Flush
Dimensions L73 x W40 x D31mm	Cut Out 70 x 35mm
Watts 1.05W	Lumens 50lm
Beam 45°	


Specifications

Input	350mA DC Constant Current
Colour Temp	3000K
CRI	90
Lifespan	50,000hrs (L70)
Material	Aluminium
IP Rating	IP40
Classification	IC-F Rated
Driver	Sold separately
Dimming/Control	Dimmable
Installation	Cut holes with extra caution (5mm rim)
Application	Interior, recessed
Warranty	5 Year Warranty

Installation Notes

R951 has been designed to be installed at approximately 300mm above finished floor level, it is recommended to trial the install height to get the desired effect on the floor before cutting the holes.

R952 is designed to be installed at ground level as pictured. Bottom of the fitting must sit directly on the floor surface with zero gap for desired light effect.

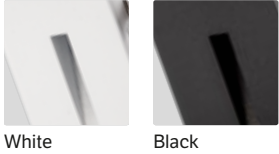

Available In

Description	Code
R951 - Standard	
White	R951 W3
Black	R951 B3
R952 - Flush	
White	R952 W3
Black	R952 B3



R919	Darklight
Dimensions L152 x W57 x D57mm	Cut Out 33 x 108mm
Watts 1.2W	Lumens 91lm
Beam 35°	

Specifications

Input	350mA DC Constant Current
Colour Temp	3000K
CRI	90
Lifespan	50,000hrs
Binning	SDCM 3
Material	Aluminium
Classification	IC Rated
Driver	Sold separately
Dimming/Control	Dimmable
Application	Interior, recessed, suitable for zero clearance installs
Warranty	5 Year Warranty



Available In

Description	Code
R919 - Darklight	
White	R919 WL
Silver	R919 SL



Use recessed wall lighting to illuminate your stairs, hallways and bathroom flooring for a comforting lighting effect.

Pictured: R397-W3K
Architecture and design: Yoke



R397 Trimless

Dimensions	L265 x W100 x D30mm	Cut Out	L210 x W100mm
Watts	1.2W	Lumens	75lm
Beam	60°		

Specifications

Input	350mA DC Constant Current
Colour Temp	3000K
CRI	80
Lifespan	>42,000hrs (L70 B10)
Binning	SDCM 3
Material	Moulding: Fibrous Plaster, Light: Aluminium
Classification	IC Rated
Driver	Sold Separately
Dimming/Control	Dimmable
Application	Interior
Warranty	5 Year Warranty



White

Black

Important

Success of installation relies entirely on the quality of paint and plaster finish. Pride must be taken with installation in order to gain a flawless appearance. Sanding should be completed to a high degree to ensure no imperfections.

Available In

Description	Code
R397 - Plaster Trimless Kit	
White	R397-W3K
Black	R397-B3K



R914

Round

Dimensions D80 x H35mm	Cut Out Ø 60mm
Watts 1.2W	Lumens 90lm
Beam 35°	




R915

Square

Dimensions L80 x W80 x D35mm	Cut Out Ø 60mm
Watts 1.2W	Lumens 90lm
Beam 35°	

Specifications

Input	350mA DC Constant Current
Colour Temp	3000K
CRI	80
Lifespan	50,000hrs
Binning	SDCM 3
Material	Aluminium
Classification	IC Rated
Driver	Sold separately
Dimming/Control	Dimmable
Application	Interior, recessed, suitable for zero clearance installs.
Warranty	5 Year Warranty

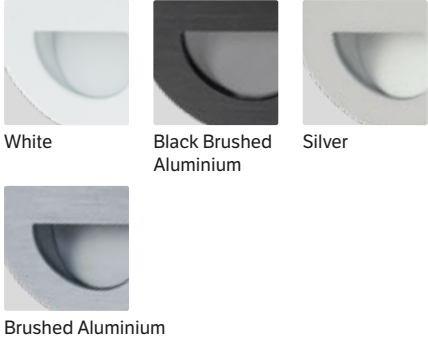

Available In

Description	Code
R914 - Round	
White	R914 WL
Silver	R914 SL
Brushed Aluminium	R914 BAL
Black Brushed Aluminium	R914 BL
R915 - Square	
White	R915 WL
Silver	R915 SL
Brushed Aluminium	R915 BAL
Black Brushed Aluminium	R915 BL



R935	Round
Dimensions D80 x H36mm	Cut Out Ø 60mm
Watts 3W	Lumens 80lm
Beam 40°	




R936	Square
Dimensions L80 x W80 x D36mm	Cut Out Ø 60mm
Watts 3W	Lumens 80lm
Beam 40°	

Specifications

Input	700mA DC Constant Current
Colour Temp	3000K
CRI	80
Lifespan	40,000hrs (L80 B10)
Material	Aluminium or 316 STS
IP Rating	IP65
Classification	IC Rated
Driver	Sold separately
Optional	Can be run at 350mA to decrease wattage and output by 20%
Dimming/Control	Dimmable
Application	Interior or exterior, recessed, suitable for zero clearance installs.
Warranty	5 Year Warranty

Accessories

Description	Code
Concrete Installation Plastic Housing (cutout Ø78mm)	R935 HO

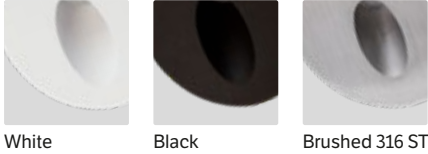

Available In

Description	Code
R935 - Round	
White	R935 W3
Brushed 316 STS	R935 BS3
Black	R935 B3
R936 - Square	
Brushed 316 STS	R936 BS3
Black	R936 B3

**R902**


Square Frosted

Dimensions L80 x W80 x D31mm **Cut Out** 68 x 68mm**Watts** DC Version: 2.1W, Kit Version: 3W **Lumens** 130lm**Beam** 100°**R904**

Square

Dimensions L80 x W80 x D31mm **Cut Out** 68 x 68mm**Watts** DC Version: 2.1W, Kit Version: 3W **Lumens** 110lm**Beam** 80°**Specifications**

Input	DC version: 700mA DC Constant Current. Kit version: 240V AC
Colour Temp	Selectable 3000K or 4000K
CRI	90
Lifespan	>60,000hrs (L80 B20)
Binning	SDCM 3
Material	Aluminium
IP Rating	IP65
Classification	IC-F
Driver	DC Version: Sold separately. Kit Version: Included, 700mA Mini Dimmable.
Optional	Can be run at 350mA/45lm or 500mA/65lm
Dimming/Control	Dimmable
Electrical Class	DC Version: Class III. Kit Version: Class II.
Application	Interior, recessed
Warranty	5 Year Warranty

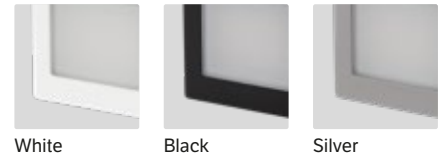

White

Black

Silver

Optional Accessory

Description	Code
Concrete/masonry installation housing L70 X W70 X D67mm (71x71mm cut out)	R902-IWH

**Available In**

Description	Code	
R902 - Square Frosted	Driver included	No driver
White	R902-W34	R902-W34-DC
Black	R902-B34	R902-B34-DC
Silver	R902-S34	R902-S34-DC

Description	Code	
R904 - Square	Driver included	No driver
White	R904-W34	R904-W34-DC
Black	R904-B34	R904-B34-DC
Silver	R904-S34	R904-S34-DC