

Spots

Exterior



**EX370** Round Medium Spot  
Watts 18.5W Lumens 1230lm  
Beam 40° Tilt 180°



**EX360** Square Semi-Flood  
Watts 22W Lumens 1757lm  
Beam 40° Tilt 180°




**EX361** Square RGB+W Semi-Flood  
Watts 32W Average Lumens 1000lm  
Beam 30° Tilt 180°

Specifications

Input	24V DC Constant Voltage
Colour Temp	EX370 EX360: 2700K, EX361: RGB + 6000K
CRI	80
Lifespan	56,000hrs (L80)
Binning	SDCM 3
Housing	Die cast Aluminium, Powdercoat Finish T=60-80um ISO Class 1/ASTM Class 4B
Glass Type	Tempered Glass T=4mm
IP Rating	IP65
IK Rating	IK08
Driver	Sold separately. EX361: RGBW control gear sold separately, specify when ordering.
Dimming/Control	EX370 EX360: Non-dimmable. EX361: Dimmable
Electrical Class	Class III
Application	Exterior, multipurpose surface mount. Suitable for both vertical or horizontal surfaces
Ambient Temp	-20..+40°C
Complete With	Pre wired with 2000mm feed cable
Warranty	5 Year Warranty

Dimensions

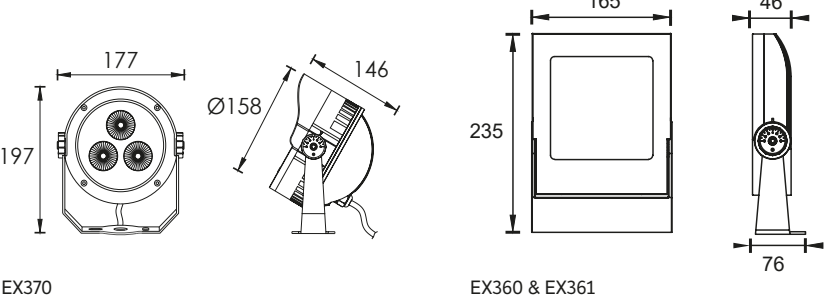

Black

Available In

Description	Code
<b>EX370 - Round Medium Spot</b>	
Black, 2700K	EX370 1SWBL
<b>EX360 - Square Semi-Flood</b>	
Black, 2700K	EX360 1BBL
<b>EX361 - Square RGB+W Semi-Flood</b>	
Black, RGB+6000K	EX361 1BRBL

Accessories

Description	Code
<b>EX360 &amp; EX361</b>	
Spike Spot 308mm	EX360 SPIKE

EX370 comes standard with a 308mm spike spot attachment included for garden installation.



Installation Notes

Take pride with installation. All cable joints must be Resin or IP68 type (standard crimps, terminal blocks and PVC tape are not suitable cable joining methods.) Incorrect installation will result in water ingress and luminaire failure.



<b>EX800</b>	Medium
<b>Dimensions</b> Spot Ø60mm	<b>Lumens</b> 545lm
<b>Watts</b> 9W	<b>Tilt</b> 140° <b>Rotate</b> 355°
<b>Beam</b> 30°	



<b>EX801</b>	Large
<b>Dimensions</b> Spot Ø80mm	<b>Lumens</b> 990lm
<b>Watts</b> 13W	<b>Tilt</b> 140° <b>Rotate</b> 355°
<b>Beam</b> 50°	



<b>EX802</b>	X-Large High Output
<b>Dimensions</b> Spot Ø116mm	<b>Lumens</b> 2435lm
<b>Watts</b> 28W	<b>Tilt</b> 140° <b>Rotate</b> 355°
<b>Beam</b> 40°	

Specifications

Input	240V AC
Colour Temp	3000K
CRI	90
Lifespan	>90,000hrs (L80 B50)
Binning	SDCM 3
Material	Aluminium
IP Rating	IP66
IK Rating	IK06
Termination	Suitable for side and rear cable entry
Driver	Incorporated
Dimming/Control	Non-dimmable
TLAs	"Flicker-free", PstLM ≤1.0; SVM ≤0.4
Electrical Class	Class I luminaire, requires earth
Application	Exterior, surface mount
Warranty	5 Year Warranty




Black


Available In

Description	Code
<b>EX800 - Medium</b>	
Black	EX800 1BBL
<b>EX801 - Large</b>	
Black	EX801 1BBL
<b>EX802 - X-Large High Output</b>	
Black	EX802 1BBL


Dimensions



EX800



EX801



EX802







EX113Single

Dimensions	Spot Ø56mm. Base Ø75mm	Lumens	620lm
Watts	9W	Tilt	180° Rotate 350°
Beam	45°		



EX113Double

Dimensions	Spot Ø56mm. Base Ø118mm	Lumens	2x 620lm
Watts	2x 9W	Tilt	180° Rotate 350°
Beam	2x 45°		

Specifications

Input	240V AC
Dimensions	Single: L204mm, Double: L189mm
Colour Temp	2700K
CRI	80
Lifespan	50,000hrs
Binning	SDCM 3
Material	316 Stainless Steel or Copper
IP Rating	IP65
Driver	Incorporated
Dimming/Control	TRIAC Dimmable
Electrical Class	Class I luminaire, requires earth
Application	Exterior, surface mount
Warranty	5 Year Warranty

Note

All Halcyon exterior products go through extensive waterproof testing and quality control prior to sale. Due to the nature of the tests all Copper and 316 STS luminaires will have slight "water staining" from water immersion. Please note that once installed Copper and 316 STS develops a natural patina finish which negates any effects from the aforementioned testing process.



Available In

Description	Code
EX113 1B - Single	
Sand Black	EX113 1BB
316 STS	EX113 1BSS
Copper	EX113 1BCO
EX113 2B - Double	
Sand Black	EX113 2BB
316 STS	EX113 2BSS
Copper	EX113 2BCO



**EX115** Mini Double

---

**Dimensions** Spot Ø40mm. Base Ø100mm    **Lumens** 2x 216lm

---

**Watts** 2x 4W    **Tilt** 180° **Rotate** 350°

---

**Beam** 2x 25°

**Specifications**

Input	240V AC
Dimensions	L142mm
Colour Temp	2700K
CRI	80
Lifespan	50,000hrs
Material	316 Stainless Steel or Copper
IP Rating	IP65
Driver	Incorporated
Dimming/Control	TRIAC Dimmable
TLAs	"Flicker-free", PstLM ≤1.0; SVM ≤0.4
Electrical Class	Class I luminaire, requires earth
Application	Exterior, surface mount
Warranty	5 Year Warranty



**Available In**

Description	Code
<b>EX115 2B - Mini Double</b>	
Sand Black	EX115 2BB
316 STS	EX115 2BSS
Copper	EX115 2BCO

**Note**

All Halcyon exterior products go through extensive waterproof testing and quality control prior to sale. Due to the nature of the tests all Copper and 316 STS luminaires will have slight "water staining" from water immersion. Please note that once installed Copper and 316 STS develops a natural patina finish which negates any effects from the aforementioned testing process.