

# Accessories

Exterior



EX100Two Way

Cable Minimum Ø5mmCable Maximum Ø14mm



EX100Three Way "T"

Cable Minimum Ø5mmCable Maximum Ø14mm

Specifications

IP Rating	IP68
Termination	Screw Fixing
Contacts	Two Way: Brass, Nickel Plated. Three Way: Copper, Nickel Plated.
Sealing Gaskets	Silicone (two sizes)
Housing	PA66, UL94-V0
Parameters	450V, PTI 250, T85
Application	Exterior
Complete With	Silicone seals and terminal block, choose between standard 3 Pole or 5 Pole for RGBW connections
Warranty	5 Year Warranty




Black

Available In

Description	Code
EX100 CJI - Two Way	
3 Pole	EX100 CJI3
5 Pole	EX100 CJI5
EX100 CJT - Three Way	
3 Pole "T"	EX100 CJT3
5 Pole "T"	EX100 CJT5

Dimensions

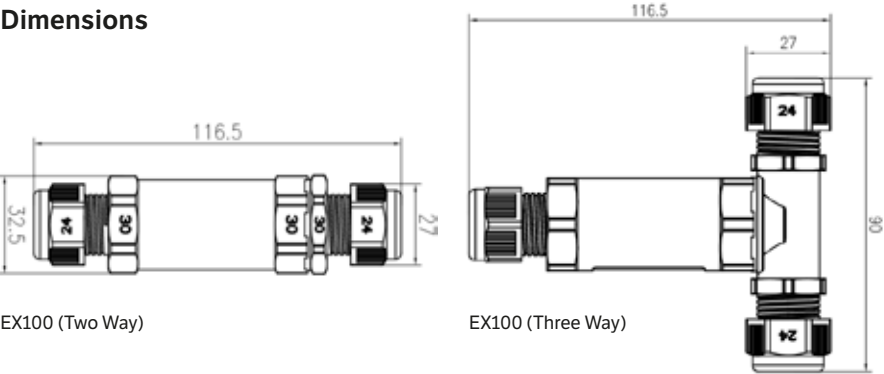

EX100 (Two Way)

EX100 (Three Way)

Installation Notes

Incorrect installation will result in water ingress and luminaire failure. Ensure cable surface is clean before running through joint, use correct silicone seals according to your cable gauge.