



Spots

Interior

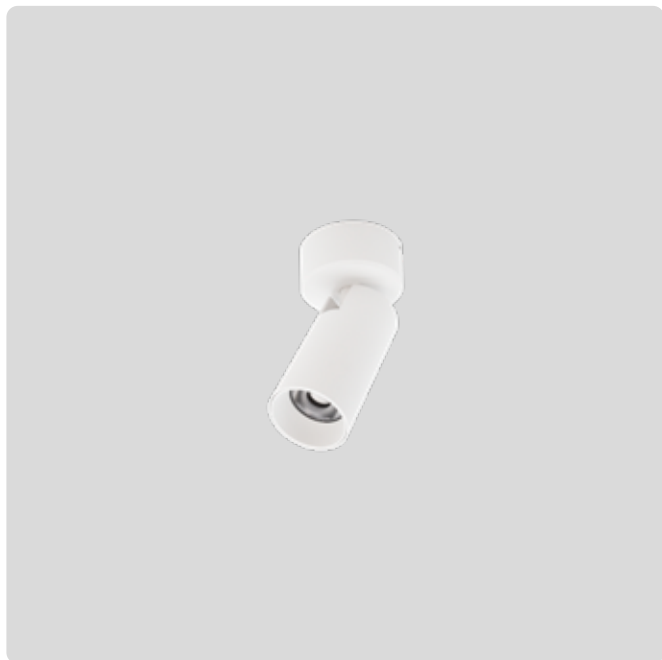


S381 Single

Dimensions D75 x L158mm	Spot D55 x L110mm
Watts 8W	Lumens 650lm
Beam 50°	Tilt 90° Rotate 350°

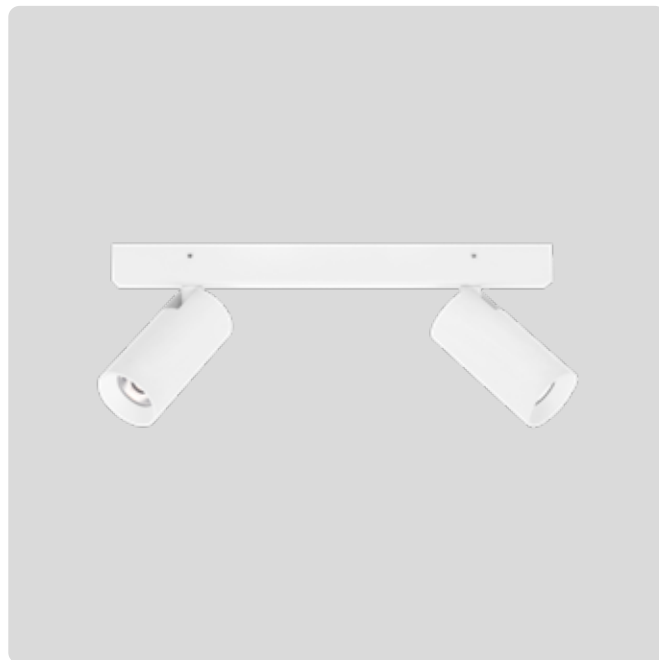

S382 Double

Dimensions L350 x W55 x H154mm	Spot D55 x L110mm
Watts 15W	Lumens 2x 650lm
Beam 2x 50°	Tilt 90° Rotate 350°

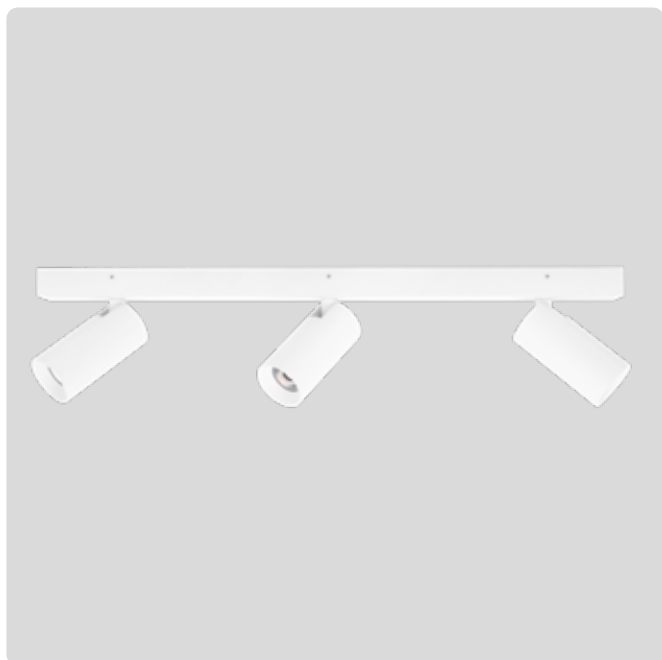

S383 Triple

Dimensions L600 x W55 x H154mm	Spot D55 x L110mm
Watts 20W	Lumens 3x 650lm
Beam 3x 50°	Tilt 90° Rotate 350°



S385 Triple Pan

Dimensions D220 x H154mm	Spot D55 x L110mm
Watts 20W	Lumens 3x 570lm
Beam 3x 50°	Tilt 90° Rotate 350°

Specifications

Input	240V AC
Colour Temp	3000K
CRI	95
Lifespan	50,000hrs
Binning	SDCM 3
Material	Aluminium
IP Rating	IP20
Driver	Incorporated
Dimming/Control	TRIAC Dimmable
TLAs	S382 S383 S385: "Flicker-free", PstLM ≤1.0; SVM ≤0.4
Electrical Class	Class I luminaire, requires earth
Application	Interior, surface mount
Warranty	5 Year Warranty



White



Black

Available In

Description	Code
S381 - Single	
White	S381 W3
Black	S381 B3
S382 - Double	
White	S382 W3
Black	S382 B3
S383 - Triple	
White	S383 W3
Black	S383 B3
S385 - Triple Pan	
White	S385 W3
Black	S385 B3

Accessories

Description	Code
15° Lens	S381 15DEG
24° Lens	S381 24DEG
36° Lens	S381 36DEG

**S900**


Tilt/Rotate

Dimensions D79 x H121mm**Lumens** 950lm**Watts** 14W**Tilt** 90° **Rotate** 355°**Beam** 60°**Specifications**


Input	240V AC
Colour Temp	3000K
CRI	97
Lifespan	>55,000hrs (L90 B20)
Binning	SDCM 3
Material	Aluminium
IP Rating	IP44
Driver	Incorporated
Dimming/Control	TRIAC Dimmable
TLAs	"Flicker-free", PstLM ≤ 1.0 ; SVM ≤ 0.4
Electrical Class	Class I luminaire, requires earth
Application	Interior, surface mount
Warranty	5 Year Warranty







White/White



White/Gold



White/Matt Black

White/High
Gloss BlackBlack/Matt
BlackBlack/ High
Gloss Black

Black/Gold

Available In

Description	Code
S900 - Tilt/Rotate	
White, White	S900-WW3
White, Matt Black	S900-WMB3
White, Gloss Black	S900-WGB3
White, Gold	S900-WG3
Black, Matt Black	S900-BMB3
Black, Gloss Black	S900-BGB3
Black, Gold	S900-BG3

Colour Parameters

Model	CCT	CRI	CRI R9	TM30 Rf	TM30 Rg
S900	3000K	98.4	97.3	94.4	101.3

Intensity

3000K, White reflector

At 2m	At 3m	At 4m
255 lux / 2.2m beam width	113 lux / 3.3m beam width	64 lux / 4.3m beam width